philips driver | output prog. 300 - 1050mA | 36W | non dim

ARTICLE NUMBER: 215-221

View this product in our webshop

Xitanium Driver



12.11.2026 - Disclaimer: information subject to change.

This Philips Xitanium LED driver can be set via SimpleSet in an output of 300 to 1050mA. SimpleSet is the latest technology from Philips which makes it possible to wireless adjust the LED driver via NFC to a desired output. This means that only one LED driver is needed for multiple applications.

This product will soon be branded as Xitanium by Signify.

Features

- Easily install the MultiOne Configurator Software.
- Connect the MultiOne SimpleSet Interface and choose the Xitanium LED program configuration.
- Place the LED Driver to be configured on the SimpleSet platform with USB connection **(exclusive, available on request).**
- The software displays a green check mark to confirm the configuration.
- Didn't choose the right output? Reprogramming with SimpleSet can easily be done in the same way.


Not in possession of the MultiOne Software? Ask us to configure the SimpleSet drivers for you! sales@tronixlighting.com or +31 (0) 413 330 380.

Technical specifications:

Product Name	philips driver | output prog. 300 - 1050mA | 36W | non dim
Ean	8714984935693
Outer box qty	20st
Housing	Plastic housing
Model	Static
Output voltage	24 - 54V
Output current	300 - 1050mA
Suitable for outdoor use	No

Suitable for DC-voltage (primary side)	No
Output power	16.2 - 36W
Degree of protection (IP)	IP20
Length	97mm
Width	43mm
Height	30mm
Power consumption	36W
Input voltage	220 - 240V
Frequency input voltage	50 - 60Hz
Overload protection	Yes
Overtemperature protection	Yes
Control method	Non-dimmable
Short-circuit protected	Yes
Ambient temperature	-20 - 50??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	Philips
Dimmable	No
Emergency power supply system	None
Control type	Constant current
Warranty	5 years



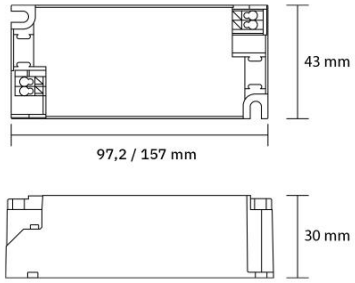

12.11.2026 - Disclaimer: information subject to change.