

Casambi | controller | Casambi/RF to trailing edge

ARTICLE NUMBER: 213-401

View this
product in
our
webshop



26.08.2026 - Disclaimer: information subject to change.



Casambi Bluetooth trailing edge dimmer for precise trailing edge phase-cut dimming of dimmable LED lighting and conventional light sources. Designed for professional installations where compatibility, stability and configurability are essential.

Key product features

- **Light value memory:** Yes
- **Suitable for use with push button:** Yes
- **Mounting method:** Recessed
- **Control voltage (V):** 100–240
- **Trailing edge dimming:** Yes
- **Max. switching capacity LED (W):** 200
- **Control method:** Casambi

Technical specifications:


Product Name	Casambi controller Casambi/RF to trailing edge
Ean	8714984953932
Outer box qty	1st
Colour	White
Connection type	Screwed terminal
Operating method	Other
Control method	Casambi
Mounting method	Built-in
Material	Plastic
Material quality	Thermoplastic
Applicable with presence indicator	Yes
Suitable for degree of protection (IP)	IP20
Applicable with movement sensor	Yes
Applicable with button	Yes
Applicable with transmission button	Yes

26.08.2026 - Disclaimer: information subject to change.



Applicable with time switch/timer	Yes
Nominal voltage	100 - 240V
Control voltage	100 - 240V
Min. depth of built-in installation box	30mm
Min. brightness controllable	Yes
Max. switching power LED	200W
Light value memory	Yes
Halogen free	Yes
RAL-number (similar)	9016
Core cross section	0.75 - 2.5mm??
Warranty	5 years

26.08.2026 - Disclaimer: information subject to change.

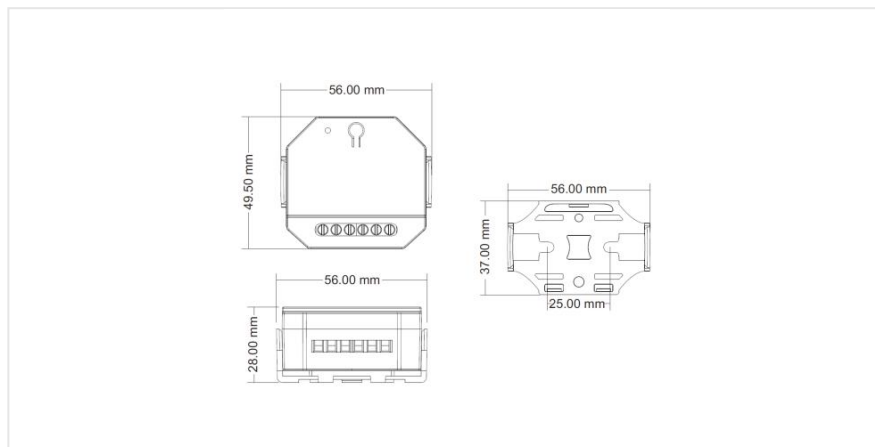

26.08.2026 - Disclaimer: information subject to change.