
Casambi | relay | 8 amp??re | RF

ARTICLE NUMBER: 213-400

View this product in our webshop

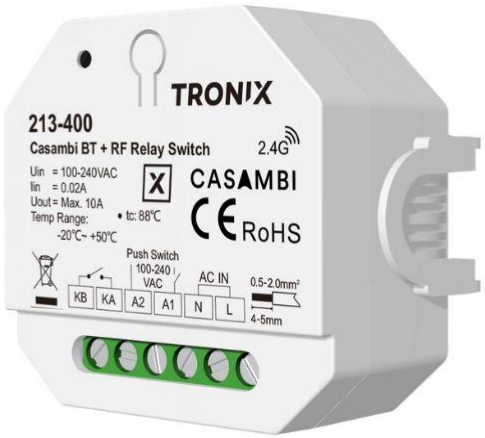

11.11.2026 - Disclaimer: information subject to change.

Casambi Bluetooth + RF relay switch for reliable wireless on/off control of LED lighting and conventional light sources. Designed for professional installations where stable switching and flexible control are essential.

Key product features


- **Suitable for use with push button:** Yes
- **Mounting method:** Recessed
- **Input voltage (V):** 100–240
- **Max. output current (A):** 10
- **Type of control:** Casambi

Technical specifications:

Product Name	Casambi | relay | 8 amp??re | RF
Ean	8714984953925
Outer box qty	1st
Model	Static
Housing	Plastic housing
Programmable	Yes
Max. output current	10A
Output voltage	100 - 240V
Suitable for outdoor use	No
Degree of protection (IP)	IP20
Length	56mm
Width	49.5mm
Height	28mm
Number of zones	1
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Input voltage	100 - 240V

11.11.2026 - Disclaimer: information subject to change.

Control method	Casambi
DIN-rail mounting	Yes
Brand	Tronix Lighting
Compatible with Casambi	Yes
Warranty	5 years

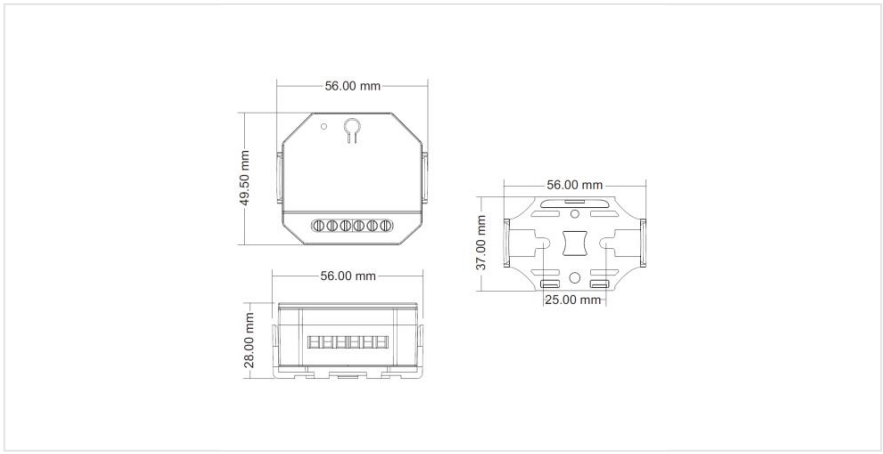
56.00 mm
49.50 mm
56.00 mm
28.00 mm
56.00 mm
37.00 mm
25.00 mm