

Philips driver | output prog. 0.3 - 1.05A | 36W | DALI dim

ARTICLE NUMBER: 215-265

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



This Philips Xitanium LED driver can be set via SimpleSet in an output of 0.3 to 1.05A. SimpleSet is the latest technology from Philips which makes it possible to wireless adjust the LED driver via NFC to a desired output. This means that only one LED driver is needed for multiple applications.

Features

- Easily install the MultiOne Configurator Software.
- Connect the MultiOne SimpleSet Interface and choose the Xitanium LED program configuration.
- Place the LED Driver to be configured on the SimpleSet platform with USB connection **(exclusive, available on request)**.
- The software displays a green check mark to confirm the configuration.
- Didn't choose the right output? Reprogramming with SimpleSet can easily be done in the same way.

Not in possession of the MultiOne Software? Ask us to configure the SimpleSet drivers for you! sales@tronixlighting.com or +31 (0) 413 330 380.



Technical specifications:

Product Name	Philips driver output prog. 0.3 - 1.05A 36W DALI dim
Ean	8714984932715
Outer box qty	36st
Housing	Plastic housing
Model	Static
Output voltage	5 - 54V
Output current	300 - 1050mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	No
Output power	0.03 - 36W

24.08.2026 - Disclaimer: information subject to change.

Degree of protection (IP)	IP20
Length	155mm
Width	42.7mm
Height	21.2mm
Power consumption	36W
Input voltage	220 - 240V
Frequency input voltage	50 - 60Hz
PWM modulation	No
Overload protection	Yes
Overtemperature protection	Yes
Control method	DALI
Short-circuit protected	Yes
Ambient temperature	-20 - 50??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	Philips
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

24.08.2026 - Disclaimer: information subject to change.

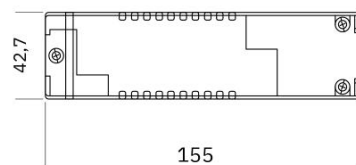

24.08.2026 - Disclaimer: information subject to change.