TRONIX guided by light

Adj. downl|| white | Ø180mm | 45° | 4000K | 18~30W | GST18i3

ARTICLE NUMBER: 136-347

View this product in our webshop



05.11.2026 - Disclaimer: information subject to change.

This rotate and swivel downlight offers optimum light output combined with adjustable Max. system power. The modern, white fixture is perfect for precise and flexible lighting adjustments in both commercial and residential spaces.

Key product features:

- **Adjustability:** Rotating and swivelling
- **Max. system power (W)**: 18 - 30
- **Colour temperature (K)**: 4000
- **Housing colour**: White
- **Outer diameter (mm):** 180
- **Built-in diameter (mm):** 165 - 175
- **Connection type:** Plug-in connector for plug-in building installation

Technical specifications:

Product Name	Adj. downl|| white | Ø180mm | 45° | 4000K | 18~30W | GST18i3
Ean	8714984950221
Outer box qty	12st
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	White
Housing material	Aluminium
Material cover	Glass transparent
Connection type	GST18i3
Height/depth	128.5mm
Outer diameter	180mm
Built-in length	- - -mm
Built-in width	- - -mm
Built-in height	102 - -mm

05.11.2026 - Disclaimer: information subject to change.

Built-in diameter	165 - 175mm
Suitable for built-in mounting	Yes
Suitable for surface mounting	No
Suitable for pedestal/floor mounting	No
Suitable for wall mounting	No
Suitable for ceiling mounting	Yes
Suitable for light-track mounting	No
Suitable for clamp-mounting	Yes
With movement sensor	No
With presence detector	No
With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6
Colour of light adjustable	No
Reflector colour	Silver
Colour temperature	4000K
Colour rendering index CRI	80-89
Luminous flux adjustable	No
Light outlet	Direct
Beam angle	41-80° - Wide beam
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	139 - 139mA
Number of poles	2
Light distributor	Reflector
Light distribution	Symmetric

05.11.2026 - Disclaimer: information subject to change.


Connectable conductor cross section	0.75 - 2.5mm²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP), front side	IP30
Degree of protection (IP), rear side	IP20
Surface protection	Lacquered
Impact strength	IK02
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	30W
Rated luminous flux according to IEC 62722-2- 1	1980 - 3300lm
Luminaire efficacy	110 - 110lm/W
Power factor	0.94
Suitable for lamp power	0 - 0W
Dimming method	Non-dimmable
Surface brushed	No
Type of wiring	Ending
Emergency power supply system	None
Emergency function monitoring system	None
Adjustability	Rotating and swivelling
Reflector	High-gloss
Warranty	5 years
Ambient temperature	-20 - 45°C
UGR level (Unified Glare Rating)	= 28


05.11.2026 - Disclaimer: information subject to change.







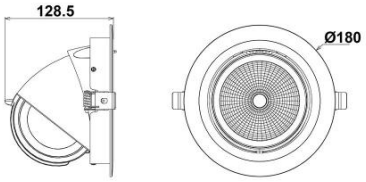

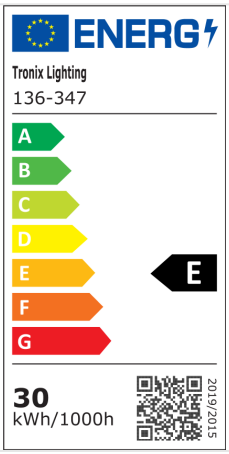

05.11.2026 - Disclaimer: information subject to change.