

Philips driver | track | prog. 0.15 - 0,5A | 20W | Casambi

ARTICLE NUMBER: 215-299

View this
product in
our
webshop




Xitanium Driver
CASAMBI



14.07.2026 - Disclaimer: information subject to change.

This Philips Xitanium Casambi LED driver is especially made for integration with 3-phase systems and is **adjustable to an output from 150 to 500 mA**. The driver is equipped with SimpleSet, Philips' latest technology that allows the driver to be set up wirelessly using NFC. As a result, you only need one driver for multiple applications.

Casambi is an advanced light system based on Bluetooth low energy. Bluetooth low energy is the only wireless technology with low power that is used in all modern smartphones, tablets and even smart watches. It created an optimal solution with minimal hardware and implementation costs.

The Casambi app works as a user interface in Casambi systems, as a configuration tool, and also as a gateway. It works with IOS and Android devices such as smartphones, tablets and smartwatches.

Features

Compact, minimalist design

Easy installation using SimpleSet

Can be integrated within the Casambi ecosystem

Setting the output

- Easily install the MultiOne Configurator Software.
- Connect the MultiOne SimpleSet Interface and choose the Xitanium LED program configuration.
- Place the LED Driver to be configured on a dedicated platform with USB connection **(exclusive, available on request)**.
- The software displays a green check mark to confirm the configuration.
- Didn't choose the right output? Reprogramming with SimpleSet can easily be done in the same way.

Not in possession of the MultiOne Software? **Ask us to pre-set the SimpleSet drivers in a desired output!** sales@tronixlighting.com or +31 (0) 413 330 380.

14.07.2026 - Disclaimer: information subject to change.

Technical specifications:

Product Name	Philips driver track prog. 0.15 - 0,5A 20W Casambi
Ean	8714984950634
Outer box qty	40st
Housing	Plastic housing
Model	Static
Output voltage	24 - 54V
Output current	150 - 500mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	No
Output power	6 - 20W
Degree of protection (IP)	IP20
Length	234mm
Width	32mm
Height	43.8mm
Power consumption	36W
Input voltage	220 - 240V
Frequency input voltage	50 - 60Hz
Overload protection	Yes
Overtemperature protection	Yes
Control method	Casambi
Short-circuit protected	Yes
Ambient temperature	-20 - 40??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	Philips
Dimmable	Yes

14.07.2026 - Disclaimer: information subject to change.



Emergency power supply system

None

Control type

Constant current

Warranty

5 years

14.07.2026 - Disclaimer: information subject to change.




CARE



SHARE



CONNECT

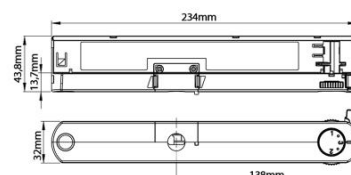

14.07.2026 - Disclaimer: information subject to change.