

Adj. downl || white | Ø180mm | 45° | 4000K |
6~15W | EU plug

ARTICLE NUMBER: 136-336

View this
product in
our
webshop



10.09.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



This rotate and swivel downlight offers optimum light output combined with adjustable Max. system power. The modern, white fixture is perfect for precise and flexible lighting adjustments in both commercial and residential spaces.

Key product features:

- **Adjustability:** Rotating and swivelling
- **Max. system power (W):** 6 – 15
- **Colour temperature (K):** 4000
- **Housing colour:** White
- **Outer diameter (mm):** 180
- **Built-in diameter (mm):** 165 - 175
- **Connection type:** Plug

Technical specifications:

Product Name	Adj. downl white Ø180mm 45° 4000K 6~15W EU plug
Ean	8714984948303
Outer box qty	12st
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	White
Housing material	Aluminium
Material cover	Glass transparent
Connection type	EU plug
Height/depth	128.5mm
Outer diameter	180mm
Built-in length	- - -mm
Built-in width	- - -mm
Built-in height	102 - -mm
Built-in diameter	165 - 175mm



10.09.2026 - Disclaimer: information subject to change.

Suitable for built-in mounting	Yes
Suitable for surface mounting	No
Suitable for pedestal/floor mounting	No
Suitable for wall mounting	No
Suitable for ceiling mounting	Yes
Suitable for light-track mounting	No
Suitable for clamp-mounting	Yes
With movement sensor	No
With presence detector	No
With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6
Colour of light adjustable	No
Reflector colour	Silver
Colour temperature	4000K
Colour rendering index CRI	80-89
Luminous flux adjustable	No
Light outlet	Direct
Beam angle	41-80° - Wide beam
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	62 - 62mA
Number of poles	2
Light distributor	Reflector
Light distribution	Symmetric
Connectable conductor cross section	0.75 - 2.5mm²

10.09.2026 - Disclaimer: information subject to change.

Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP), front side	IP30
Degree of protection (IP), rear side	IP20
Surface protection	Lacquered
Impact strength	IK02
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	15W
Rated luminous flux according to IEC 62722-2- 1	660 - 1650lm
Luminaire efficacy	110 - 110lm/W
Power factor	0.96
Suitable for lamp power	0 - 0W
Dimming method	Non-dimmable
Surface brushed	No
Type of wiring	Ending
Emergency power supply system	None
Emergency function monitoring system	None
Adjustability	Rotating and swivelling
Unified Glare Ratio (UGR)	24.4
Reflector	High-gloss
Warranty	5 years
Ambient temperature	-20 - 45°C

10.09.2026 - Disclaimer: information subject to change.

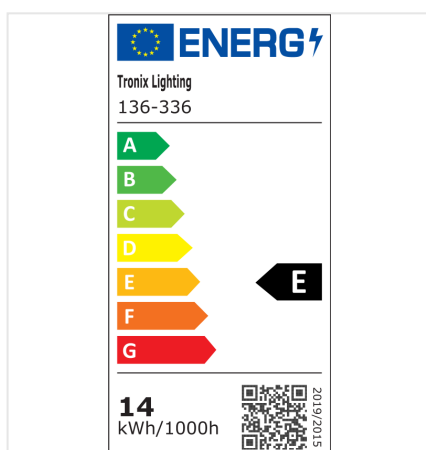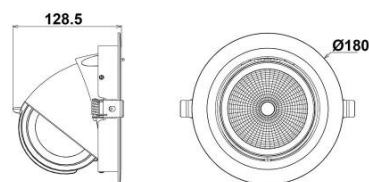

10.09.2026 - Disclaimer: information subject to change.