


TRONIX



Technical data	CCT, RGB, RGB+W, 1...4 Channel
Article number	214-205
Input	12..24 Vdc
Signal input	Bluetooth 4.0lite @ Smart-device
Radio signal	2,4..2,483 GHz; 4 dBm
Max. output power at 12Vdc	72 W
Max. output power at 24Vdc	144 W
PWM frequency	~ 400 Hz
Ambient temperature (ta)	-20..+45 °C
Rated max. temperature (tc)	75 °C
Dimensions	73 x 30 x 18mm

- LED dimmer, easily operated by smartphone or tablet (Apple, Android) via Bluetooth
- For LED strips and other modules for constant voltage
- For up to 4 channels (colour mixture or single light sources) freely configurable
- Free App from CASAMBI (Apple/Android):
 - control of brightness and light colour
 - configuration of luminaires and luminaires networks
 - creation of scenes and animations (colour gradients)
 - automatic detection of new devices
 - intelligent timer and gallery functions
 - protection settings of your luminaires network („just me“, „with password“,...)
- You can setup a gateway, but it is not necessary
- Integrated antenna
- Also controllable via Xpress Remote Control and RW...EBT
- Protection class: 3
- Pollution degree: 1
- Do not insert switches into the secondary circuit!

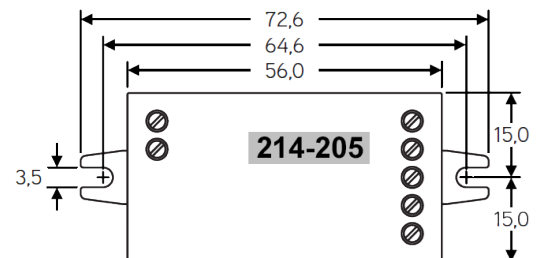

App for
iOS

App for
Android



CCT

RGB

RGB+W

1 CH.


12-24Vdc

+
-


2 CH.

3 CH.

4 CH.

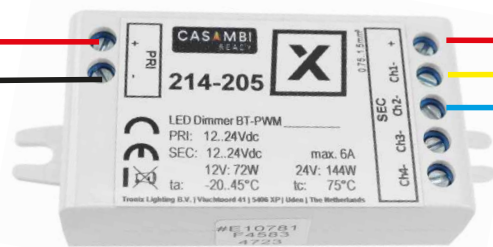


+
WW-
CW-

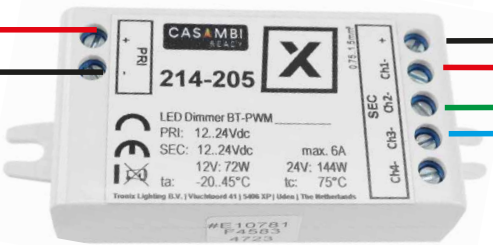


+
R-
G-
B-




+
R-
G-
B-
W-

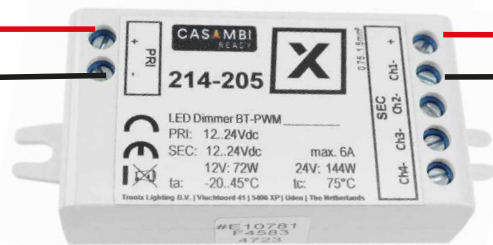

+
CH1-

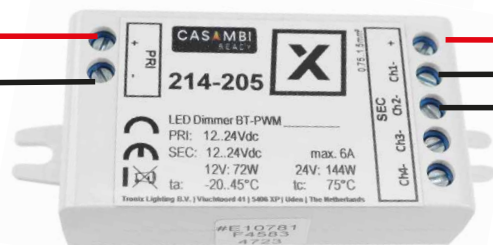

+
CH1-
CH2-

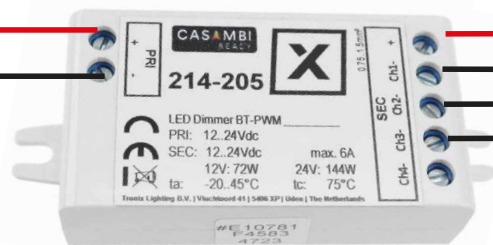

+
CH1-
CH2-
CH3-



+
CH1-
CH2-
CH3-
CH4-

