

TRONIX




CASAMBI
READY

CE

Technical data	
Article number	214-206
Input	85..240 Vac; 50..60 Hz
Signal input	Bluetooth 4.0 lite @ Smart- device
Radio signal	2,4..2,483 GHz; 4 dBm
Power at 115 Vac	1..50 W
Power at 230 Vac	1..100 W
Ambient temperature (ta)	-20..+45 °C
Rated max. temperature (tc)	75 °C
IP rate	30
Dimensions	75 x 38 x 22 mm

- Easily operated dimmer for fixed installation to control luminaires by smartphone or tablet (Apple, Android)
- For operation of incandescent lamps, dimmable LED lamps and LED and halogen lamp control gear. Don't mix different types of loads! Not for magnetic transformers
- Free App from CASAMBI (Apple/Android):
 - lighting control (dim level)
 - configuration of luminaires and luminaires networks
 - creation of scenes and animations
 - automatic detection of new devices
 - intelligent timer and gallery functions
 - protection settings of your luminaires network (only with password access)
- You can setup a gateway, but it is not necessary
- Integrated antenna (drawing: grey marking, do not cover with metal case)
- In installation housing or with terminal cover
- Mains current max. 0.65 A, inrush current: max. 10 A (100 ms)
- Proof tracking index: <600, pollution degree: 2
Not changeable fuse F2A/250 Vac
- Reverse phase control dimmer

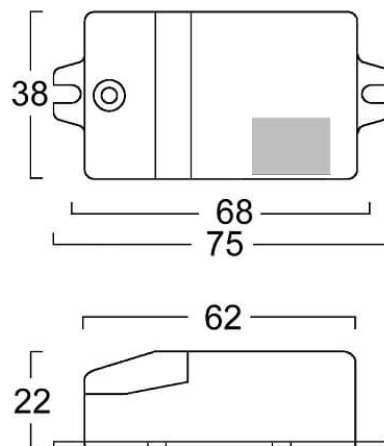

App for
iOS

App for
Android

