

LED driver | 180mA | 6 watt | IP20 | 17 ~ 34
volt | dimmable

ARTICLE NUMBER: 215-339

View this
product in
our
webshop



14.07.2026 - Disclaimer: information subject to change.

This flicker-free LED driver has a maximum output of 6W and 180mA and is extremely well suited for use with various light sources. Thanks to the techniques present, this driver is flicker-free, which means that (dimnable) lighting looks calm at all times.

Features

- Dimmable on phase cut-off and cut-on
- Output voltage from 17 ~ 34 V
- Super compact size 48*30*20 mm

Technical specifications:


Product Name	LED driver 180mA 6 watt IP20 17 ~ 34 volt dimmable
Ean	8714984950924
Outer box qty	100st
Housing	Plastic housing
Model	Static
Output voltage	17 - 34V
Output current	180 - 180mA
Suitable for outdoor use	Yes
Suitable for DC-voltage (primary side)	No
Output power	4 - 4W
Degree of protection (IP)	IP20
Length	48mm
Width	30mm
Height	20mm
Power consumption	6W
Input voltage	220 - 240V
Frequency input voltage	50 - 60Hz
Overload protection	Yes

14.07.2026 - Disclaimer: information subject to change.



Overtemperature protection	Yes
Control method	Trailing edge dimming
Short-circuit protected	Yes
Ambient temperature	-20 - 60??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

14.07.2026 - Disclaimer: information subject to change.

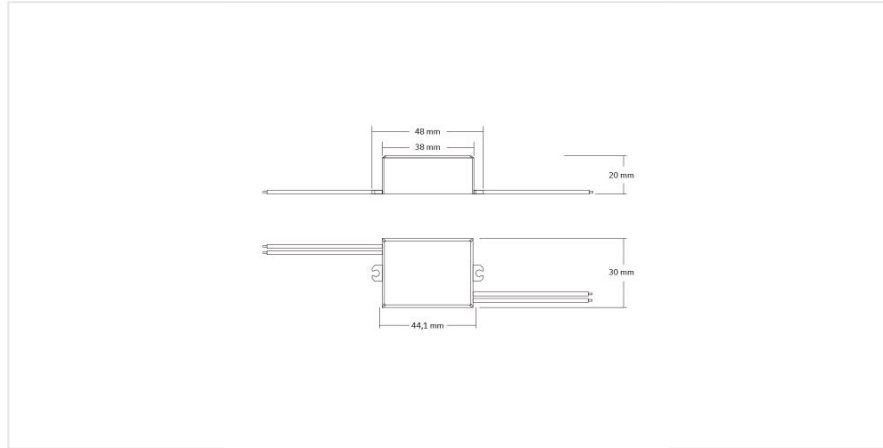

14.07.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT