

LED driver | 350mA | 18 watt | flicker free |
trailing edge

ARTICLE NUMBER: 215-380

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.

This flicker-free LED driver has a maximum output of 18W and 350mA and is extremely well suited for use with various light sources. Thanks to the techniques present, this driver is flicker-free, which means that (dimnable) lighting looks calm at all times.

Features

- Dimmable on phase cut-off and cut-on
- Output voltage of 26 ~ 52 V
- Super compact size 120*45*28 mm

Technical specifications:


Product Name	LED driver 350mA 18 watt flicker free trailing edge
Ean	8714984940956
Outer box qty	100st
Housing	Plastic housing
Model	Static
Output voltage	26 - 52V
Output current	350 - 350mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	No
Output power	18 - 18W
Degree of protection (IP)	IP20
Length	120mm
Width	45mm
Height	28mm
Power consumption	18W
Input voltage	220 - 240V
Frequency input voltage	50 - 60Hz
Overload protection	Yes

24.08.2026 - Disclaimer: information subject to change.



Overtemperature protection	Yes
Control method	Trailing edge dimming
Short-circuit protected	Yes
Ambient temperature	-20 - 45??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

24.08.2026 - Disclaimer: information subject to change.

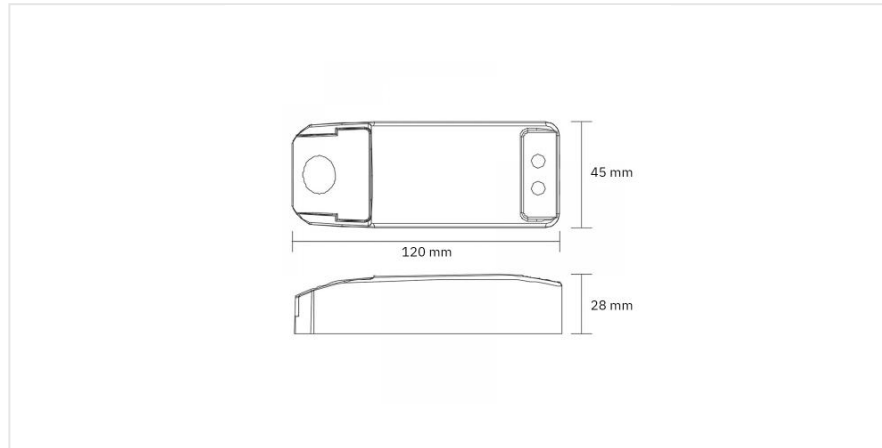

24.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT