TRONIX guided by light

Architectural || project module IP44 | 2.5W | 3000K

ARTICLE NUMBER: 148-288

View this product in our webshop



24.11.2026 - Disclaimer: information subject to change.

AS LONG AS SUPPLIES LAST!

Alternative option
148-278

Tronix modules are equipped with a Plug&Play connector. The connector is easy to connect to a module-extension cable (up to 10 meters), a module-divider (up to 6 pieces), or directly to a Tronix driver. This makes even the most complicated lighting plans easy to realize!

Specifications

- Excellent color rendering CRI >80
- Perfectly compatible with protocols> DALI, Casambi, Triac, 110V
- Good heat dissipation and long lifespan
- High quality aluminum with powder coating, or aluminum anodized

Porchlight module: IP44 modules specially designed for porches and overhangs.


Technical specifications:


Product Name	Architectural || project module IP44 | 2.5W | 3000K
Ean	8714984908871
Outer box qty	100st
Colour	White
Housing colour	Aluminium
Connection type	Other
Height	31mm
Diameter	32mm
Lamp power	2.5 - 2.5W
Colour temperature	3000K
Beam angle	40 - 40??
Voltage type	DC

Operating voltage	3.6 - 3.6V
Operating current	700 - 700mA
Suitable for constant voltage	No
Suitable for constant current	Yes
Average nominal lifetime	30000h
Degree of protection (IP)	IP44
Luminous flux	129 - 129lm
Specific luminous efficacy	51.6 - 51.6lm/W
Number of LEDs	1
External driver required	Yes
Warranty	3 years






32
31
53

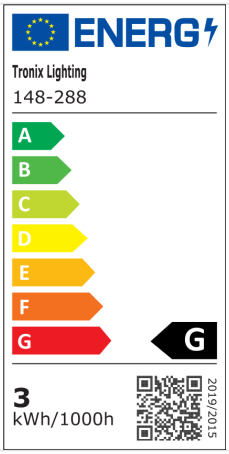
ENERG
Tronix Lighting
148-288
A
B
C
D
E
F
G
G
3
kWh/1000h
2019/2015