

# Batten light || 600mm | 10~25W | IP20 | 3-CCT

ARTICLE NUMBER: 136-305

View this  
product in  
our  
webshop



26.08.2026 - Disclaimer: information subject to change.



Robust surface-mounted luminaire with adjustable output and colour temperature. Ideal for through-wiring and suitable for technical areas, corridors, and storage spaces.

## Key product features:

- **Suitable for surface mounting:** Yes
- **Colour temperature (K):** 3000 – 5700
- **Length (mm):** 600
- **Width (mm):** 124
- **Max. system power (W):** 25
- **Type of wiring:** Suitable for through-wiring

## Technical specifications:

|                        |                                               |
|------------------------|-----------------------------------------------|
| Product Name           | Batten light    600mm   10~25W   IP20   3-CCT |
| Ean                    | 8714984933170                                 |
| Outer box qty          | 12st                                          |
| Dimmable               | No                                            |
| Connection type        | Push-in clamp                                 |
| Lamp type              | LED not exchangeable                          |
| Housing colour         | White                                         |
| Material               | Plastic                                       |
| Length                 | 60cm                                          |
| Length                 | 600mm                                         |
| Width                  | 124mm                                         |
| Height/depth           | 68mm                                          |
| With movement sensor   | No                                            |
| With presence detector | No                                            |
| With light sensor      | No                                            |

26.08.2026 - Disclaimer: information subject to change.

|                                                |                                         |
|------------------------------------------------|-----------------------------------------|
| Colour of light                                | White                                   |
| Colour temperature                             | 3000 - 4000 - 5700K                     |
| Colour rendering index CRI                     | 80-89                                   |
| Colour of light adjustable                     | Positions                               |
| Luminous flux adjustable                       | Positions                               |
| Beam angle adjustable                          | No                                      |
| Voltage type                                   | AC                                      |
| Nominal voltage                                | 232 - 232V                              |
| Nominal current                                | 43 - 109mA                              |
| Number of poles                                | 3                                       |
| Light distributor                              | Diffuser lens/optic/panel               |
| Connectable conductor cross section            | 0.75 - 2.5mm <sup>2</sup>               |
| Type of control gear                           | LED operating device current-controlled |
| Exchangeable control gear                      | No                                      |
| With control gear                              | Yes                                     |
| Degree of protection (IP)                      | IP20                                    |
| Impact strength                                | IK08                                    |
| Rated lifetime L70/B50 at 25 °C                | 60000h                                  |
| Max. system power                              | 25W                                     |
| Rated luminous flux according to IEC 62722-2-1 | 1300 - 3250lm                           |
| Luminaire efficacy                             | 130lm/W                                 |
| Power factor                                   | 0.96                                    |
| Type of wiring                                 | Suitable for loop-through wiring        |
| Suitable for emergency lighting                | No                                      |
| Emergency power supply system                  | None                                    |
| Emergency function monitoring system           | None                                    |

26.08.2026 - Disclaimer: information subject to change.



Warranty

5 years

26.08.2026 - Disclaimer: information subject to change.





CARE



SHARE



CONNECT

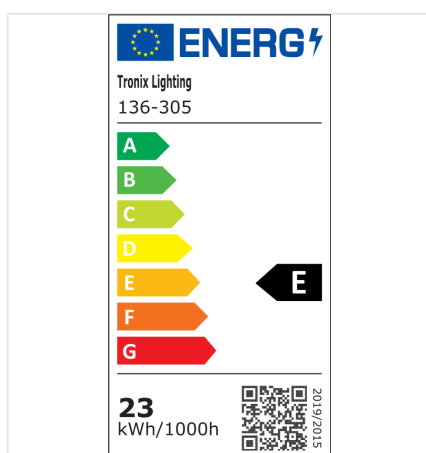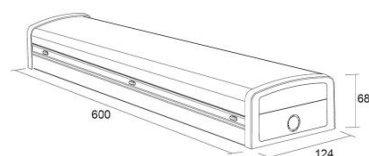

26.08.2026 - Disclaimer: information subject to change.