



# Bulkhead | 3-CCT | IK10 | IP65

ARTICLE NUMBER: 137-020

View this  
product in  
our  
webshop



Product Image

04.10.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



Robust LED wall and ceiling luminaire with IP65 and IK10 ratings. Power output and light colour can be adjusted via integrated DIP switches. Suitable for both indoor and outdoor applications in demanding environments.

## Key product features:

- **Colour temperature (K):** 3000 – 5700
- **Impact strength:** IK10
- **Nominal voltage (V):** 220-240
- **Max. system power (W):** 6
- **Degree of protection (IP), front side:** IP65

## Technical specifications:

|                                 |                                         |
|---------------------------------|-----------------------------------------|
| Product Name                    | Bulkhead   3-CCT   IK10   IP65          |
| Ean                             | 8714984952102                           |
| Outer box qty                   | 1st                                     |
| Lamp type                       | LED exchangeable                        |
| Housing material                | Plastic                                 |
| Housing colour                  | White                                   |
| Material cover                  | Plastic, opal                           |
| Suitable for emergency lighting | No                                      |
| Nominal current                 | 12 - 27mA                               |
| Voltage type                    | AC                                      |
| Type of control gear            | LED operating device current-controlled |
| With control gear               | Yes                                     |
| Constant light output (CLO)     | No                                      |
| Type of grid                    | None                                    |
| Nominal voltage                 | 220 - 240V                              |

04.10.2026 - Disclaimer: information subject to change.

|                                       |                           |
|---------------------------------------|---------------------------|
| Length                                | 358mm                     |
| Width                                 | 120mm                     |
| Height/depth                          | 82mm                      |
| Colour of light                       | White                     |
| Colour rendering index CRI            | 80-89                     |
| Exchangeable control gear             | Yes                       |
| Dimming 0-10 V                        | No                        |
| Dimming 1-10 V                        | No                        |
| Dimming DALI                          | No                        |
| Dimming phase cut-off (trailing edge) | No                        |
| With movement sensor                  | No                        |
| With presence detector                | No                        |
| Impact strength                       | IK10                      |
| With light sensor                     | No                        |
| Suitable for surface mounting         | Yes                       |
| With remote control                   | No                        |
| Suitable for built-in mounting        | No                        |
| Light distribution                    | Symmetric                 |
| Beam angle                            | Open beam/diffuse         |
| Light outlet                          | Direct                    |
| Dimming RF                            | No                        |
| Dimming Zigbee                        | No                        |
| Light distributor                     | Diffuser lens/optic/panel |
| Surface protection housing            | Untreated                 |
| Colour consistency (McAdam ellipse)   | SDCM3                     |
| Rated lifetime L70/B50 at 25 °C       | 200000h                   |
| Colour of light adjustable            | Positions                 |

04.10.2026 - Disclaimer: information subject to change.

|                                                                            |                                  |
|----------------------------------------------------------------------------|----------------------------------|
| Luminous flux adjustable                                                   | Positions                        |
| Max. system power                                                          | 6W                               |
| Lumen maintenance at median useful life of 100,000 h at 25 °C ambient (tq) | 80%                              |
| Beam angle adjustable                                                      | No                               |
| Power factor                                                               | 0.9                              |
| Failure rate at median useful life of 100,000 h at 25 °C ambient (tq)      | 10%                              |
| Type of wiring                                                             | Suitable for loop-through wiring |
| Number of poles                                                            | 2                                |
| Compatible with Casambi                                                    | No                               |
| Luminaire efficacy                                                         | 76 - 90lm/W                      |
| Dimmable                                                                   | No                               |
| Rated luminous flux according to IEC 62722-2- 1                            | 165 - 505lm                      |
| Emergency power supply system                                              | None                             |
| Suitable for ceiling mounting                                              | Yes                              |
| Connectable conductor cross section                                        | 0.5 - 2.5mm <sup>2</sup>         |
| Suitable for wall mounting                                                 | Yes                              |
| Suitable for suspended mounting                                            | No                               |
| Movement sensor/presence detector technology                               | High frequency                   |
| Suitable for workplace according to EN 12464-1                             | Yes                              |
| Degree of protection (IP), rear side                                       | IP65                             |
| Degree of protection (IP), front side                                      | IP65                             |
| With mounting material                                                     | Yes                              |
| Colour temperature                                                         | 3000 - 4000 - 5700K              |

04.10.2026 - Disclaimer: information subject to change.



|                                  |            |
|----------------------------------|------------|
| With connection cord and plug    | No         |
| Warranty                         | 5 years    |
| Ambient temperature              | -20 - 45°C |
| UGR level (Unified Glare Rating) | = 19       |

04.10.2026 - Disclaimer: information subject to change.




CARE



SHARE



CONNECT

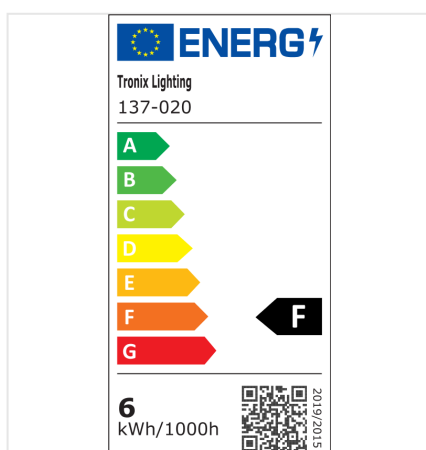

04.10.2026 - Disclaimer: information subject to change.