

# Bulkhead | 3-CCT | IK10 | IP65 | sensor

ARTICLE NUMBER: 137-021

View this  
product in  
our  
webshop



14.09.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



LED wall and ceiling luminaire with integrated microwave sensor, featuring IP65 and IK10 ratings. Power output and light colour can be adjusted via DIP switches. The sensor can also be configured as a day/night sensor for automatic switching based on ambient light levels.

## Key product features:

- **Colour temperature (K):** 3000 – 5700
- **Impact strength:** IK10
- **Nominal voltage (V):** 34
- **Max. system power (W):** 6
- **Degree of protection (IP), front side:** IP65

## Technical specifications:

|                                 |                                         |
|---------------------------------|-----------------------------------------|
| Product Name                    | Bulkhead   3-CCT   IK10   IP65   sensor |
| Ean                             | 8714984952119                           |
| Outer box qty                   | 1st                                     |
| Lamp type                       | LED exchangeable                        |
| Housing material                | Plastic                                 |
| Housing colour                  | White                                   |
| Material cover                  | Plastic, opal                           |
| Suitable for emergency lighting | No                                      |
| Nominal current                 | 12 - 27mA                               |
| Voltage type                    | AC                                      |
| Type of control gear            | LED operating device current-controlled |
| With control gear               | Yes                                     |
| Constant light output (CLO)     | No                                      |
| Type of grid                    | None                                    |
| Nominal voltage                 | 220 - 240V                              |



14.09.2026 - Disclaimer: information subject to change.

|                                       |                           |
|---------------------------------------|---------------------------|
| Length                                | 358mm                     |
| Width                                 | 120mm                     |
| Height/depth                          | 82mm                      |
| Colour of light                       | White                     |
| Colour rendering index CRI            | 80-89                     |
| Exchangeable control gear             | Yes                       |
| Dimming 0-10 V                        | No                        |
| Dimming 1-10 V                        | No                        |
| Dimming DALI                          | No                        |
| Dimming phase cut-off (trailing edge) | No                        |
| With movement sensor                  | Yes                       |
| With presence detector                | No                        |
| Impact strength                       | IK10                      |
| With light sensor                     | Yes                       |
| Suitable for surface mounting         | Yes                       |
| Suitable for built-in mounting        | No                        |
| Light distribution                    | Symmetric                 |
| Beam angle                            | Open beam/diffuse         |
| Light outlet                          | Direct                    |
| Dimming RF                            | No                        |
| Dimming Zigbee                        | No                        |
| Light distributor                     | Diffuser lens/optic/panel |
| Surface protection housing            | Untreated                 |
| Colour consistency (McAdam ellipse)   | SDCM3                     |
| Rated lifetime L70/B50 at 25 °C       | 200000h                   |
| Colour of light adjustable            | Positions                 |
| Luminous flux adjustable              | Positions                 |

14.09.2026 - Disclaimer: information subject to change.

|                                                 |                                  |
|-------------------------------------------------|----------------------------------|
| Max. system power                               | 6W                               |
| Beam angle adjustable                           | No                               |
| Power factor                                    | 0.9                              |
| Type of wiring                                  | Suitable for loop-through wiring |
| Number of poles                                 | 2                                |
| Compatible with Casambi                         | No                               |
| Luminaire efficacy                              | 76 - 90lm/W                      |
| Dimmable                                        | No                               |
| Rated luminous flux according to IEC 62722-2- 1 | 165 - 505lm                      |
| Emergency power supply system                   | None                             |
| Suitable for ceiling mounting                   | Yes                              |
| Connectable conductor cross section             | 0.5 - 2.5mm??                    |
| Suitable for wall mounting                      | Yes                              |
| Suitable for suspended mounting                 | No                               |
| Movement sensor/presence detector technology    | High frequency                   |
| Suitable for workplace according to EN 12464-1  | Yes                              |
| Unified Glare Ratio (UGR)                       | 17                               |
| Degree of protection (IP), rear side            | IP65                             |
| Degree of protection (IP), front side           | IP65                             |
| With mounting material                          | Yes                              |
| Colour temperature                              | 3000 - 4000 - 5700K              |
| With connection cord and plug                   | No                               |
| Warranty                                        | 5 years                          |
| Ambient temperature                             | -20 - 45??C                      |

14.09.2026 - Disclaimer: information subject to change.

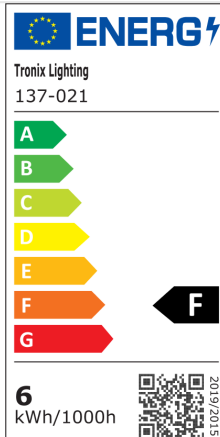

14.09.2026 - Disclaimer: information subject to change.