Bulkhead | 3-CCT | IK10 | IP65 | sensor + emergency

ARTICLE NUMBER: 137-023

View this product in our webshop

Product Image

15.11.2026 - Disclaimer: information subject to change.

LED wall and ceiling luminaire with integrated microwave sensor and emergency lighting function, featuring IP65 and IK10 ratings. Power output and light colour can be adjusted via DIP switches. Designed as an energy-efficient and reliable lighting solution for safety-critical applications.

Key product features:

- **Suitable for emergency lighting:** Yes
- **Colour temperature (K):** 3000 – 5700
- **With movement sensor:** Yes
- **Impact strength:** IK10
- **Nominal voltage (V):** 220-240
- **Max. system power (W):** 6
- **Degree of protection (IP), front side:** IP65

Technical specifications:

Product Name	Bulkhead | 3-CCT | IK10 | IP65 | sensor + emergency
Ean	8714984952133
Outer box qty	1st
Lamp type	LED exchangeable
Housing material	Plastic
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	Yes
Nominal current	12 - 27mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes

15.11.2026 - Disclaimer: information subject to change.

Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Length	358mm
Width	120mm
Height/depth	82mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	Yes
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	Yes
With presence detector	No
Impact strength	IK10
With light sensor	Yes
Suitable for surface mounting	Yes
With remote control	No
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	Open beam/diffuse
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Diffuser lens/optic/panel
Surface protection housing	Untreated


15.11.2026 - Disclaimer: information subject to change.


Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 °C	200000h
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Max. system power	6W
Lumen maintenance at median useful life of 100,000 h at 25 °C ambient (tq)	80%
Beam angle adjustable	No
Power factor	0.9
Failure rate at median useful life of 100,000 h at 25 °C ambient (tq)	10%
Type of wiring	Suitable for loop-through wiring
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	76 - 90lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	165 - 505lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatische zelftest
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.5 - 2.5mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Movement sensor/presence detector technology	High frequency

15.11.2026 - Disclaimer: information subject to change.

Suitable for workplace according to EN 12464-1	Yes
Degree of protection (IP), rear side	IP65
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	3000 - 4000 - 5700K
With connection cord and plug	No
Luminous flux in emergency mode	150lm
Power consumption in emergency mode	2W
Warranty	5 years
Ambient temperature	0 - 45°C
UGR level (Unified Glare Rating)	= 19



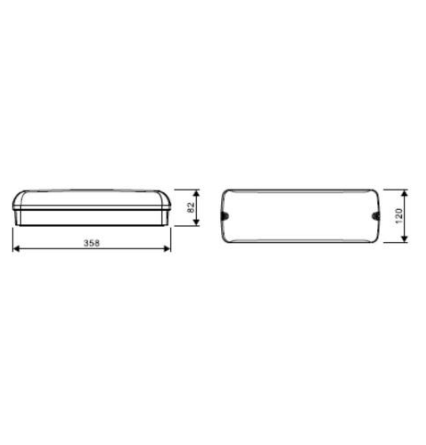

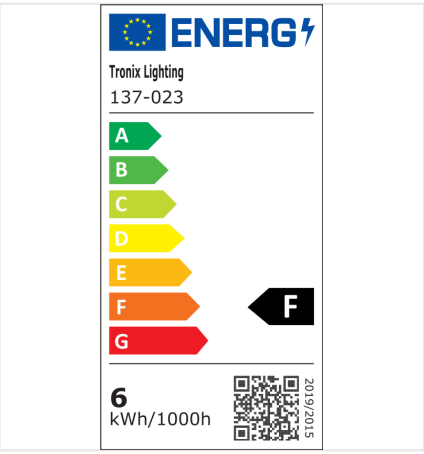

15.11.2026 - Disclaimer: information subject to change.