

Bulkhead | 3-CCT | IK10 | IP65 | sensor + emergency

ARTICLE NUMBER: 137-023

View this
product in
our
webshop



14.09.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



LED wall and ceiling luminaire with integrated microwave sensor and emergency lighting function, featuring IP65 and IK10 ratings. Power output and light colour can be adjusted via DIP switches. Designed as an energy-efficient and reliable lighting solution for safety-critical applications.

Key product features:

- **Suitable for emergency lighting:** Yes
- **Colour temperature (K):** 3000 – 5700
- **With movement sensor:** Yes
- **Impact strength:** IK10
- **Nominal voltage (V):** 34
- **Max. system power (W):** 6
- **Degree of protection (IP), front side:** IP65

Technical specifications:

Product Name	Bulkhead 3-CCT IK10 IP65 sensor + emergency
Ean	8714984952133
Outer box qty	1st
Lamp type	LED exchangeable
Housing material	Plastic
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	Yes
Nominal current	12 - 27mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes

14.09.2026 - Disclaimer: information subject to change.

Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Length	358mm
Width	120mm
Height/depth	82mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	Yes
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	Yes
With presence detector	No
Impact strength	IK10
With light sensor	Yes
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	Open beam/diffuse
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Diffuser lens/optic/panel
Surface protection housing	Untreated
Colour consistency (McAdam ellipse)	SDCM3

14.09.2026 - Disclaimer: information subject to change.

Rated lifetime L70/B50 at 25 °C	200000h
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Max. system power	6W
Beam angle adjustable	No
Power factor	0.9
Type of wiring	Suitable for loop-through wiring
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	76 - 90lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	165 - 505lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatische zelftest
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.5 - 2.5mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Movement sensor/presence detector technology	High frequency
Suitable for workplace according to EN 12464-1	Yes
Unified Glare Ratio (UGR)	17
Degree of protection (IP), rear side	IP65
Degree of protection (IP), front side	IP65
With mounting material	Yes

14.09.2026 - Disclaimer: information subject to change.



Colour temperature	3000 - 4000 - 5700K
--------------------	---------------------

With connection cord and plug	No
-------------------------------	----



Luminous flux in emergency mode	150lm
---------------------------------	-------

Power consumption in emergency mode	2W
-------------------------------------	----

Warranty	5 years
----------	---------

Ambient temperature	0 - 45??C
---------------------	-----------

14.09.2026 - Disclaimer: information subject to change.

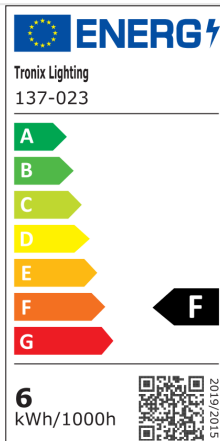

14.09.2026 - Disclaimer: information subject to change.