

Ceiling light || 8W | 60° | dim to warm
3000~2000K | black

ARTICLE NUMBER: 136-232

View this
product in
our
webshop



14.07.2026 - Disclaimer: information subject to change.

Due to its modern appearance and high-quality features, these surface-mounted spots can be used in many spaces. Think of reception areas, living areas, hospitality Industry, shops, offices or under a terras roof.

Features

- Dim to warm from 3000K to 2000K
- Pre-assembled screw holes for universal flush-mounted boxes
- Adjustable spotlight (20°)
- Long service life > 50,000 hours
- High CRI value > 90

Technical specifications:

Product Name	Ceiling light 8W 60° dim to warm 3000~2000K black
Ean	8714984940703
Outer box qty	24st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Plastic, transparent
Suitable for emergency lighting	No
Nominal current	33.5 - 40mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Length	135mm
Width	135mm



14.07.2026 - Disclaimer: information subject to change.

Height/depth	60mm
Colour of light	White
Colour rendering index CRI	90-100
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	Yes
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	41-80° - Wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Reflector
Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	Continuously variable
Luminous flux adjustable	Continuously variable
Max. system power	8W
Beam angle adjustable	No

14.07.2026 - Disclaimer: information subject to change.

Power factor	0.94
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	55 - 55lm/W
Dimmable	Yes
Rated luminous flux according to IEC 62722-2- 1	275 - 440lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm ²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	19
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	Dim To Warm
With connection cord and plug	No
Warranty	3 years

14.07.2026 - Disclaimer: information subject to change.

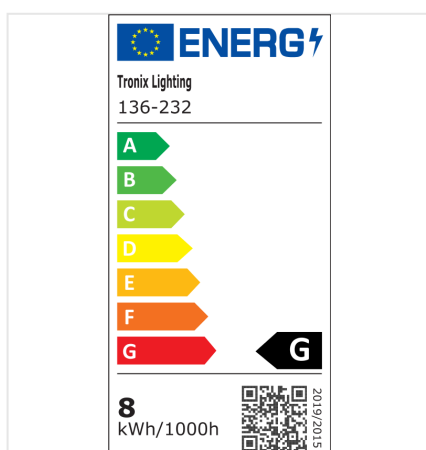

14.07.2026 - Disclaimer: information subject to change.