TRONIX guided by light

Ceiling light || 8W | 60° | dim to warm 3000~2000K | black

ARTICLE NUMBER: 136-232

View this product in our webshop



02.11.2026 - Disclaimer: information subject to change.

Due to its modern appearance and high-quality features, these surface-mounted spots can be used in many spaces. Think of reception areas, living areas, hospitality Industry, shops, offices or under a terras roof.

Features

- Dim to warm from 3000K to 2000K
- Pre-assembled screw holes for universal flush-mounted boxes
- Adjustable spotlight (20°)
- Long service life> 50,000 hours
- High CRI value> 90

Technical specifications:


Product Name	Ceiling light || 8W | 60° | dim to warm 3000~2000K | black
Ean	8714984940703
Outer box qty	24st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Plastic, transparent
Suitable for emergency lighting	No
Nominal current	33.5 - 40mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Length	135mm
Width	135mm


Height/depth	60mm
Colour of light	White
Colour rendering index CRI	90-100
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	Yes
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	41-80° - Wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Reflector
Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	Continuously variable
Luminous flux adjustable	Continuously variable
Max. system power	8W
Beam angle adjustable	No

02.11.2026 - Disclaimer: information subject to change.

Power factor	0.94
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	55 - 55lm/W
Dimmable	Yes
Rated luminous flux according to IEC 62722-2- 1	275 - 440lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	Dim To Warm
With connection cord and plug	No
Warranty	3 years
Ambient temperature	-20 - 40°C





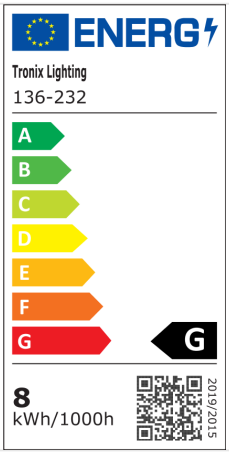

02.11.2026 - Disclaimer: information subject to change.