

Ceiling light bar || opal | 1375mm | 41W | IP20 | 4000K

ARTICLE NUMBER: 179-024

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



The Tronix 'Ceiling light bar' is especially developed for the HeartFelt® Modular and Acoustic Ceiling system: an advanced system for architects, installers and building owners that delivers the right acoustics in every single room, setting or environment.

This sophisticated 'light bar' can easily be attached to any existing HeartFelt® ceiling carrier system with mounting brackets to hold them in place. They can be applied in one single line, in a more playful way, or just in the most efficient way possible.

How it works

1. Choose the fixture
2. Use a mounting bracket for the existing HeartFelt® ceiling: 40HL55, 40HL80 or 40HL105.
3. Connect multiple fixtures to create a single in-line effect (combine with coupler 179-050)
4. Choose one trailing edge or DALI dimmable driver for each luminaire. Every driver included a metal mounting plate for fixture attachment.

Technical specifications:

Product Name	Ceiling light bar opal 1375mm 41W IP20 4000K
Ean	8714984937475
Outer box qty	12st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Plastic, opal
Suitable for emergency lighting	Yes
Nominal current	170 - 186mA
Voltage type	AC

24.08.2026 - Disclaimer: information subject to change.

Type of control gear	LED operating device current-controlled
With control gear	No
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Length	1375mm
Width	40mm
Height/depth	35mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Indirect
Dimming RF	No
Dimming Zigbee	No
Light distributor	Diffuser lens/optic/panel

24.08.2026 - Disclaimer: information subject to change.

Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	No
Luminous flux adjustable	Continuously variable
Max. system power	41W
Beam angle adjustable	No
Power factor	0.9
Type of wiring	Ending
Number of poles	2
Compatible with Casambi	No
Luminaire efficacy	98 - 98lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	3638 - 3638lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm²
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	22
Degree of protection (IP), rear side	IP20
With mounting material	Yes
Colour temperature	4000K
With connection cord and plug	No
Warranty	5 years

24.08.2026 - Disclaimer: information subject to change.



Ambient temperature

-20 - 45°C

24.08.2026 - Disclaimer: information subject to change.





CARE



SHARE



CONNECT

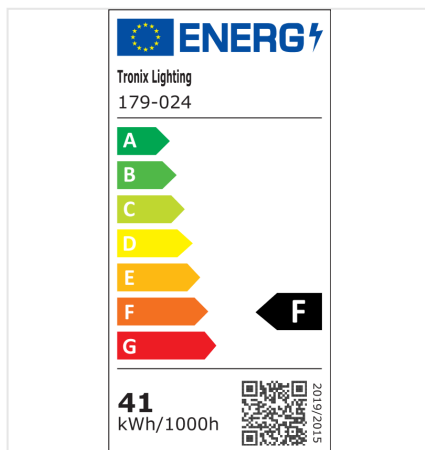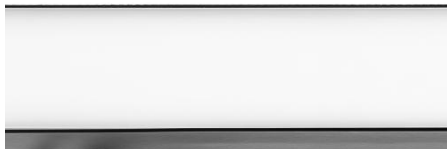

24.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT