

Ceiling light || black | Ø300mm | 15W | IP65 | 3-CCT

ARTICLE NUMBER: 136-045

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.

Due to the simple adjustment of light color, this ceiling fixture is suitable for placement in various spaces such as offices, living spaces, schools, hotels and other public spaces.

Features

- High quality internal driver with optimum heat regulation
- Can be directly connected by using the terminal block on the fixture
- Adjustable by a CCT switch in the color temperatures 3000K, 4000K and 5700K
- Long service life of 50,000 hours
- IP65 for installation in moist areas

Technical specifications:

Product Name	Ceiling light black Ø300mm 15W IP65 3-CCT
Ean	8714984941892
Outer box qty	6st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Plastic, opal
Suitable for emergency lighting	No
Nominal current	62.5 - 68mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Outer diameter	300mm
Constant light output (CLO)	No
Type of grid	Matt
Nominal voltage	220 - 240V



24.08.2026 - Disclaimer: information subject to change.

Height/depth	60mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK08
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	Positions
Luminous flux adjustable	No
Max. system power	15W
Beam angle adjustable	No

24.08.2026 - Disclaimer: information subject to change.

Power factor	0.9
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	100 - 100lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	1500 - 1500lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm ²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	25
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	3000 - 4000 - 5700K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 45°C

24.08.2026 - Disclaimer: information subject to change.

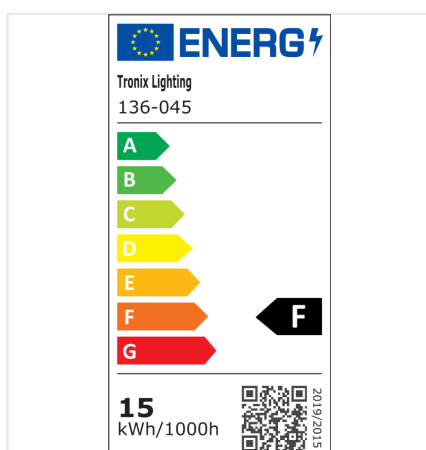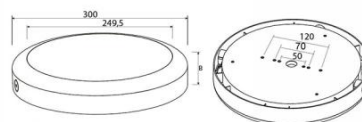

24.08.2026 - Disclaimer: information subject to change.