TRONIX guided by light

Ceiling light | Ø180mm | 5/7 Watt | 2700K/3000K/4000K | PIR

ARTICLE NUMBER: 136-026

View this product in our webshop



14.11.2026 - Disclaimer: information subject to change.

CARE SHARE CONNECT

tronixlighting.com

Compact indoor ceiling luminaire with adjustable power and three selectable colour temperatures. With a PIR sensor for automatic control.

Key product features

- **Colour temperature (K):** 2700–4000
- **Housing colour:** White
- **With movement sensor:** Yes
- **Max. system power (W):** 5–7

Technical specifications:

Product Name	Ceiling light | Ø180mm | 5/7 Watt | 2700K/3000K/4000K | PIR
Ean	8714984952058
Outer box qty	40st
Lamp type	LED not exchangeable
Housing material	Plastic
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	No
Nominal current	22 - 30mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Outer diameter	180mm
Constant light output (CLO)	No
Type of grid	Matt
Nominal voltage	220 - 240V
Height/depth	38mm
Colour of light	White

14.11.2026 - Disclaimer: information subject to change.

Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	Yes
With presence detector	Yes
Impact strength	IK06
With light sensor	Yes
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Untreated
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Max. system power	7W
Beam angle adjustable	No
Power factor	0.9
Type of wiring	Suitable for loop-through wiring


14.11.2026 - Disclaimer: information subject to change.


Number of poles	2
Compatible with Casambi	No
Luminaire efficacy	130 - 130lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	570 - 920lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 2.5mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Movement sensor/presence detector technology	Passive infrared
Suitable for workplace according to EN 12464-1	No
Degree of protection (IP), rear side	IP44
Degree of protection (IP), front side	IP44
With mounting material	Yes
Colour temperature	2700 - 3000 - 4000K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 40°C

14.11.2026 - Disclaimer: information subject to change.







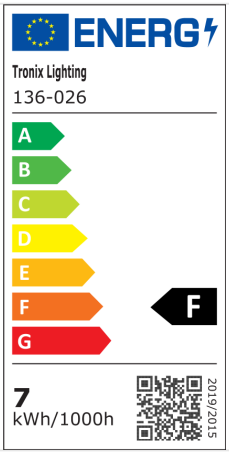

14.11.2026 - Disclaimer: information subject to change.