

Ceiling light | Ø180mm | 5/7 Watt |
2700K/3000K/4000K | PIR

ARTICLE NUMBER: 136-026

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.

Compact indoor ceiling luminaire with adjustable power and three selectable colour temperatures. With a PIR sensor for automatic control.

Key product features

- **Colour temperature (K):** 2700–4000
- **Housing colour:** White
- **With movement sensor:** Yes
- **Max. system power (W):** 5–7

Technical specifications:

Product Name	Ceiling light Ø180mm 5/7 Watt 2700K/3000K/4000K PIR
Ean	8714984952058
Outer box qty	40st
Lamp type	LED not exchangeable
Housing material	Plastic
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	No
Nominal current	22 - 30mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Outer diameter	180mm
Constant light output (CLO)	No
Type of grid	Matt
Nominal voltage	220 - 240V
Height/depth	38mm
Colour of light	White



24.08.2026 - Disclaimer: information subject to change.

Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	Yes
With presence detector	Yes
Impact strength	IK06
With light sensor	Yes
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Untreated
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Max. system power	7W
Beam angle adjustable	No
Power factor	0.9
Type of wiring	Suitable for loop-through wiring

24.08.2026 - Disclaimer: information subject to change.

Number of poles	2
Compatible with Casambi	No
Luminaire efficacy	130 - 130lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2-1	570 - 920lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 2.5mm ²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Movement sensor/presence detector technology	Passive infrared
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	25
Degree of protection (IP), rear side	IP44
Degree of protection (IP), front side	IP44
With mounting material	Yes
Colour temperature	2700 - 3000 - 4000K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 40°C

24.08.2026 - Disclaimer: information subject to change.

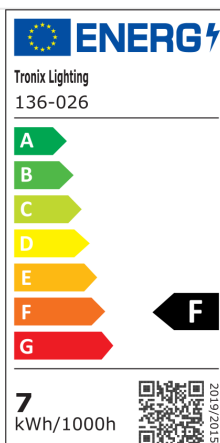

24.08.2026 - Disclaimer: information subject to change.