

Ceiling light | Ø280mm | 10/15W | 3- CCT | PIR

ARTICLE NUMBER: 136-049

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.

Robust ceiling light with adjustable light color 3000, 4000 and 5700K, power (10-15W) and motion sensor. Features drop protection, IK08 impact strength and IP54 protection. Ideal for safe, versatile lighting in demanding environments.

Key product features:

- **Colour temperature (K):** 3000 - 5700
- **Housing colour:** White
- **With movement sensor:** Yes
- **Impact strength:** IK08
- **Max. system power (W):** 10 - 15

Technical specifications:

Product Name	Ceiling light Ø280mm 10/15W 3-CCT PIR
Ean	8714984949799
Outer box qty	10st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	No
Nominal current	67 - 67mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Outer diameter	280mm
Constant light output (CLO)	No
Type of grid	Matt
Nominal voltage	220 - 240V



24.08.2026 - Disclaimer: information subject to change.

Height/depth	68mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	Yes
With presence detector	No
Impact strength	IK08
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	Positions
Luminous flux adjustable	No
Max. system power	15W
Beam angle adjustable	No

24.08.2026 - Disclaimer: information subject to change.

Power factor	0.9
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	100 - 100lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	1000 - 1500lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 2.5mm ²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	23.6
Degree of protection (IP), front side	IP53
With mounting material	Yes
Colour temperature	3000 - 4000 - 5700K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 65°C

24.08.2026 - Disclaimer: information subject to change.

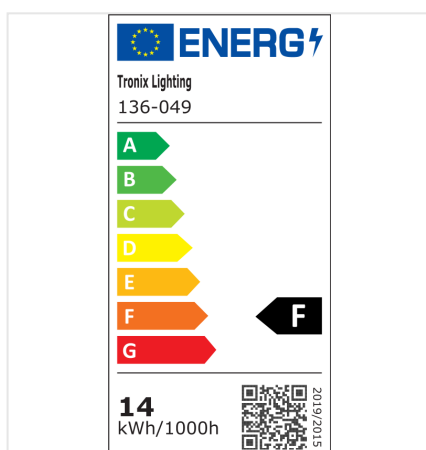

24.08.2026 - Disclaimer: information subject to change.