

Ceiling Light | Ø280mm | 12 watt | 3-CCT

ARTICLE NUMBER: 136-002

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.

Minimalist ceiling light (Ø280 mm, 12W) with adjustable Colour temperature (3000K, 4000K, 6000K). Easy installation, uniform light distribution, and optionally available with a high-frequency motion sensor. Suitable for various applications.

Key product features:

- **Colour temperature (K):** 3000 - 6000
- **Material cover:** Plastic, opal
- **Outer diameter (mm):** 280
- **With movement sensor:** No
- **Max. system power (W):** 12
- **Colour of light adjustable:** Positions

Technical specifications:

Product Name	Ceiling Light Ø280mm 12 watt 3-CCT
Ean	8714984908840
Outer box qty	12st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	No
Nominal current	53 - 53mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Outer diameter	280mm
Constant light output (CLO)	No
Type of grid	Matt



24.08.2026 - Disclaimer: information subject to change.

Nominal voltage	220 - 240V
Height/depth	95mm
Colour of light	White
Colour rendering index CRI	70-79
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	30000h
Colour of light adjustable	Positions
Luminous flux adjustable	No
Max. system power	12W

24.08.2026 - Disclaimer: information subject to change.

Beam angle adjustable	No
Power factor	0.92
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	90 - 90lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	1080 - 1080lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm ²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	19.4
Degree of protection (IP), front side	IP44
With mounting material	Yes
Colour temperature	3000 - 4000 - 6000K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 40°C

24.08.2026 - Disclaimer: information subject to change.

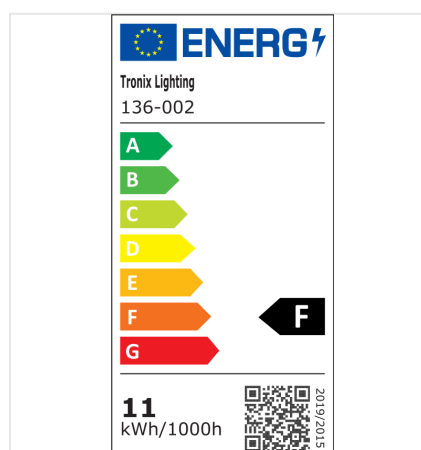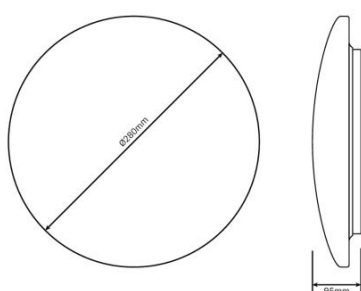

24.08.2026 - Disclaimer: information subject to change.