

Ceiling light | Ø280mm | 12 watt | 3-CCT | motion sensor

ARTICLE NUMBER: 136-003

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Minimalist ceiling light (Ø280 mm, 12W) with adjustable Colour temperature (3000K, 4000K, 6000K). Easy installation and uniform light distribution. Suitable for various applications.

Key product features:

- **Colour temperature (K):** 3000 - 6000
- **Material cover:** Plastic, opal
- **Outer diameter (mm):** 280
- **With movement sensor:** Yes
- **Max. system power (W):** 12
- **Colour of light adjustable:** Positions
- **Movement sensor technology:** High frequency

Technical specifications:

Product Name	Ceiling light Ø280mm 12 watt 3-CCT motion sensor
Ean	8714984908857
Outer box qty	12st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	No
Nominal current	190 - 190mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Outer diameter	280mm
Constant light output (CLO)	No
Type of grid	Matt



24.08.2026 - Disclaimer: information subject to change.

Nominal voltage	220 - 240V
Height/depth	95mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	Yes
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	30000h
Colour of light adjustable	Positions
Luminous flux adjustable	No
Max. system power	12W

24.08.2026 - Disclaimer: information subject to change.

Beam angle adjustable	No
Power factor	0.9
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	90 - 90lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	1080 - 1080lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm ²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Movement sensor/presence detector technology	High frequency
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	25
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	3000 - 4000 - 6000K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 40°C

24.08.2026 - Disclaimer: information subject to change.

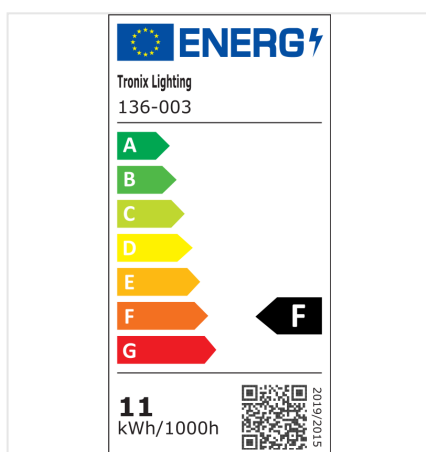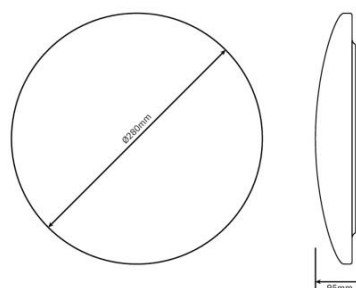

24.08.2026 - Disclaimer: information subject to change.