

ARTICLE NUMBER: 213-254



CARE SHARE CONNECT



This compact DALI-2 AC trailing edge dimmer precisely controls 230V light sources via phase dimming. Suitable for professional installations where compact integration, flexibility and reliable DALI control are required.

## Key product features

- **Control method:** DALI
- **Number of colour channels:** 1
- **Output voltage (V):** 100 – 240
- **Input voltage (V):** 100 – 240
- **Max. output current (A):** 1.5
- **Suitable for flush mounting:** Yes

## Technical specifications:


|                                        |                                                      |
|----------------------------------------|------------------------------------------------------|
| Product Name                           | DALI   controller   DALI to trailing edge   recessed |
| Ean                                    | 8714984953680                                        |
| Outer box qty                          | 1st                                                  |
| Colour                                 | White                                                |
| Connection type                        | Screw terminal                                       |
| Operating method                       | Other                                                |
| Control method                         | DALI                                                 |
| Mounting method                        | Built-in                                             |
| Material                               | Plastic                                              |
| Material quality                       | Thermoplastic                                        |
| Applicable with presence indicator     | Yes                                                  |
| Suitable for degree of protection (IP) | IP20                                                 |
| Applicable with movement sensor        | Yes                                                  |
| Applicable with button                 | Yes                                                  |
| Applicable with transmission button    | No                                                   |

24.08.2026 - Disclaimer: information subject to change.



|                                         |                |
|-----------------------------------------|----------------|
| Applicable with time switch/timer       | Yes            |
| Nominal voltage                         | 100 - 240V     |
| Control voltage                         | 100 - 240V     |
| Min. depth of built-in installation box | 28mm           |
| Min. brightness controllable            | Yes            |
| Max. switching power LED                | 200W           |
| Light value memory                      | Yes            |
| Halogen free                            | Yes            |
| RAL-number (similar)                    | 9016           |
| Core cross section                      | 0.75 - 2.5mm?? |
| Warranty                                | 5 years        |

24.08.2026 - Disclaimer: information subject to change.

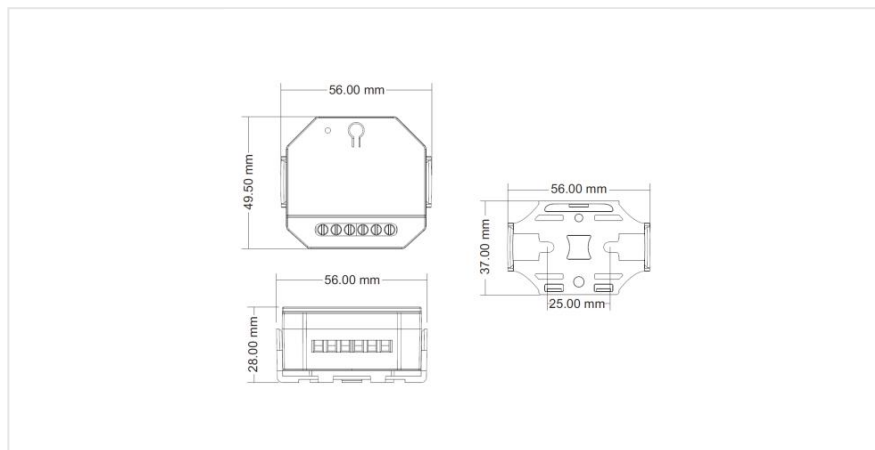

24.08.2026 - Disclaimer: information subject to change.