
TRONIX guided by light

# DALI driver for ceiling light bar || GST18/5 connector

ARTICLE NUMBER: 179-060

View this product in our webshop

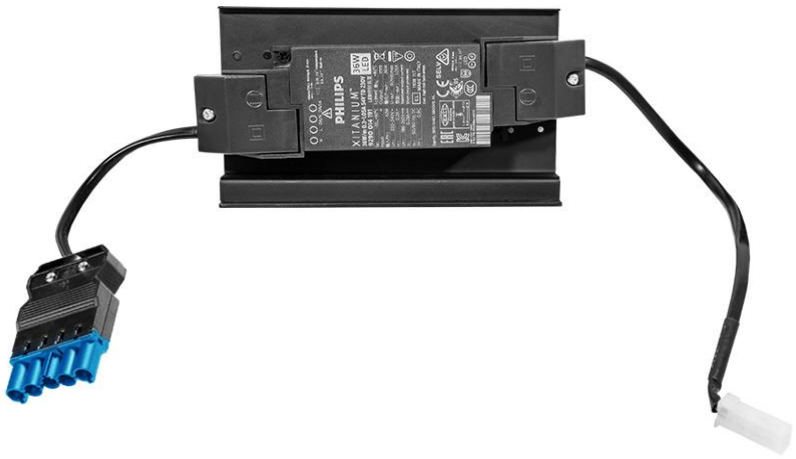


14.11.2026 - Disclaimer: information subject to change.

The Tronix 'Ceiling light bar' is especially developed for the HeartFelt® Modular and Acoustic Ceiling system: an advanced system for architects, installers and building owners that delivers the right acoustics in every single room, setting or environment.

This sophisticated 'light bar' can easily be attached to any existing HeartFelt® ceiling carrier system with mounting brackets to hold them in place. They can be applied in one single line, in a more playful way, or just in the most efficient way possible.

**How it works**

1. Choose the fixture
2. Use a mounting bracket for the existing HeartFelt® ceiling: 40HL55, 40HL80 or 40HL105.
3. Connect multiple fixtures to create a single in-line effect (combine with coupler 179-050)
4. Choose one trailing edge or DALI dimmable driver for each luminaire. Every driver inclused a metal mounting plate for fixture attachment.

**Technical specifications:**

| | |
|---|---|
| Product Name | DALI driver for ceiling light bar \|\| GST18/5 connector |
| Ean | 8714984937598 |
| Outer box qty | 1st |
| Housing | Plastic housing |
| Model | Dynamic |
| Output voltage | 220 - 240V |
| Output current | 1050 - 1050mA |
| Suitable for outdoor use | No |
| Suitable for DC-voltage (primary side) | No |
| Output power | 36 - 36W |

14.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Degree of protection (IP) | IP20 |
| Length | 160mm |
| Width | 30mm |
| Height | 68mm |
| Power consumption | 36W |
| Input voltage | - - -V |
| Frequency input voltage | - - -Hz |
| Overload protection | Yes |
| Overtemperature protection | Yes |
| Control method | DALI |
| Short-circuit protected | Yes |
| Ambient temperature | - - -??C |
| DIN-rail mounting | No |
| Brand | Tronix Lighting |
| Dimmable | Yes |
| Emergency power supply system | None |
| Control type | Constant voltage |
| Warranty | 2 years |

14.11.2026 - Disclaimer: information subject to change.

