

Downlight | Ø220mm | black | 5-CCT |  
13~25W | EU plug

ARTICLE NUMBER: 136-519

View this  
product in  
our  
webshop



14.07.2026 - Disclaimer: information subject to change.



5 colour temperatures, 5 wattages, 5 sizes. This versatile downlight combines adaptability, performance and reliability in one compact solution. Features an IP44 front, low glare (UGR<19) and 5-year warranty.

## Key product features

- **Max. system power (W):** 25
- **Colour temperature (K):** 2700 – 3000 – 3500 – 4000 – 5700
- **Housing colour:** Black
- **Outer diameter (mm):** 220
- **Luminous flux adjustable:** fixed steps
- **Built-in diameter (mm):** 195 - 210
- **Connection type:** Euro plug

## Technical specifications:

|                   |                                                       |
|-------------------|-------------------------------------------------------|
| Product Name      | Downlight   Ø220mm   black   5-CCT   13~25W   EU plug |
| Ean               | 8714984951587                                         |
| Outer box qty     | 12st                                                  |
| Lamp type         | LED not exchangeable                                  |
| Lamp holder       | None                                                  |
| Housing colour    | Black                                                 |
| Housing material  | Aluminium                                             |
| Material cover    | Plastic, opal                                         |
| Connection type   | EU plug                                               |
| Height/depth      | 121mm                                                 |
| Outer diameter    | 220mm                                                 |
| Built-in length   | - - -mm                                               |
| Built-in width    | - - -mm                                               |
| Built-in height   | 121 - -mm                                             |
| Built-in diameter | 195 - 210mm                                           |



14.07.2026 - Disclaimer: information subject to change.

|                                      |                                   |
|--------------------------------------|-----------------------------------|
| Suitable for built-in mounting       | Yes                               |
| Suitable for surface mounting        | No                                |
| Suitable for pedestal/floor mounting | No                                |
| Suitable for wall mounting           | No                                |
| Suitable for ceiling mounting        | No                                |
| Suitable for light-track mounting    | No                                |
| Suitable for clamp-mounting          | Yes                               |
| With movement sensor                 | No                                |
| With presence detector               | No                                |
| With light sensor                    | No                                |
| Colour of light                      | White                             |
| Colour consistency (McAdam ellipse)  | SDCM3                             |
| Colour of light adjustable           | Positions                         |
| Reflector colour                     | Silver                            |
| Colour temperature                   | 2700 - 3000 - 3500 - 4000 - 5700K |
| Colour rendering index CRI           | 90-100                            |
| Luminous flux adjustable             | Positions                         |
| Light outlet                         | Direct                            |
| Beam angle                           | 41-80° - Wide beam                |
| Beam angle adjustable                | No                                |
| Voltage type                         | AC                                |
| Nominal voltage                      | 220 - 240V                        |
| Nominal current                      | 56 - 105mA                        |
| Number of poles                      | 2                                 |
| Light source included                | Yes, fixed LED                    |
| Light distributor                    | Reflector                         |
| Light distribution                   | Symmetric                         |

14.07.2026 - Disclaimer: information subject to change.

|                                                 |                                         |
|-------------------------------------------------|-----------------------------------------|
| Connectable conductor cross section             | 0.5 - 2.5mm <sup>2</sup>                |
| Type of control gear                            | LED operating device current-controlled |
| Exchangeable control gear                       | Yes                                     |
| With control gear                               | Yes                                     |
| Degree of protection (IP), front side           | IP44                                    |
| Degree of protection (IP), rear side            | IP20                                    |
| Surface protection                              | Powder coating                          |
| Impact strength                                 | IK02                                    |
| Rated lifetime L70/B50 at 25 °C                 | 50000h                                  |
| Max. system power                               | 25W                                     |
| Rated luminous flux according to IEC 62722-2- 1 | 1300 - 2500lm                           |
| Luminaire efficacy                              | 100 - 100lm/W                           |
| Power factor                                    | 0.97                                    |
| Suitable for lamp power                         | 0 - 0W                                  |
| Dimming method                                  | Non-dimmable                            |
| Surface brushed                                 | No                                      |
| Type of wiring                                  | Ending                                  |
| Emergency power supply system                   | None                                    |
| Emergency function monitoring system            | None                                    |
| Adjustability                                   | not adjustable                          |
| Unified Glare Ratio (UGR)                       | 17.1                                    |
| Reflector                                       | High-gloss                              |
| Warranty                                        | 5 years                                 |

14.07.2026 - Disclaimer: information subject to change.

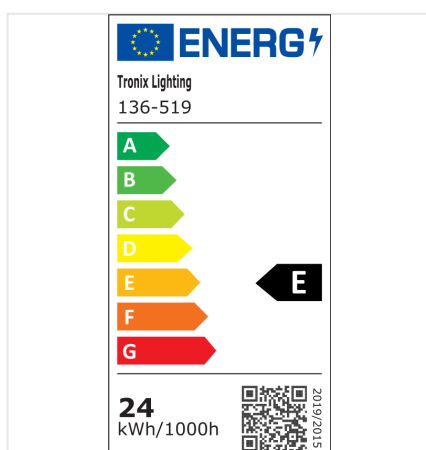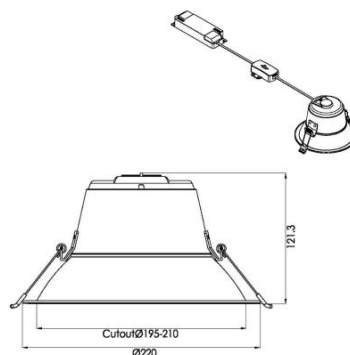

14.07.2026 - Disclaimer: information subject to change.