TRONIX guided by light

Emergency bulk head | 3W | auto test | incl. pictograms

ARTICLE NUMBER: 600-021

View this product in our webshop



13.11.2026 - Disclaimer: information subject to change.

Impact-resistant and splashproof LED emergency luminaire with automatic self-test and 8 interchangeable pictograms. Suitable for wall and ceiling installation in indoor and outdoor environments. Delivers 200 lumens and 3 hours of emergency operation.

Key product features

- **Mounting method:** Wall surface/ceiling surface
- **Max. system power (W):** 3
- **Protection class (IP):** IP65
- **Recognition distance (m):** 20
- **Function:** Escape route lighting/signage
- **Impact resistance:** IK10
- **Emergency function monitoring system:** Automatic self-test

Technical specifications:

Product Name	Emergency bulk head | 3W | auto test | incl. pictograms
Ean	8714984935303
Outer box qty	10st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	White
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	80 - 80mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Wall surface mounting/ceiling surface mounting
Degree of protection (IP)	IP65
Nominal voltage	220 - 240V
Length	340mm


13.11.2026 - Disclaimer: information subject to change.


Width	62mm
Height	105mm
Height/depth	105mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting/signage
With pictogram	Yes
Suitable for standby switching	Yes
Suitable for continuous circuit	Yes
Impact strength	IK10
RAL-number housing	9016
Connection type	Plug-in connection
Light distributor	Diffuser lens/optic/panel
Rated lifetime L70/B50 at 25 ??C	50000h
Luminous flux in standby mode	200lm
Nominal operation time	3 - 3h
Max. system power	3W
Power factor	0.5
Type of wiring	Ending
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2- 1	200 - 200lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test
Luminous flux in emergency mode	200lm

13.11.2026 - Disclaimer: information subject to change.

Recognition distance	20m
Power consumption in emergency mode	2W
Type of indicator	Single-sided
Connectable conductor cross section	0.75 - 2.5mm??
Suitable for labelling type	Sticker
Warranty	5 years (battery 2 years)
Ambient temperature	1 - 45??C



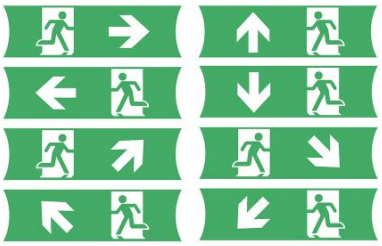

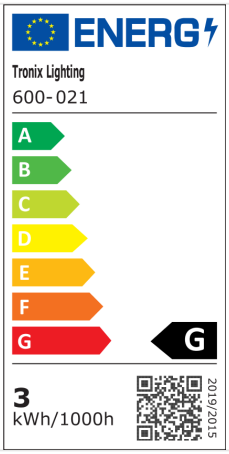

13.11.2026 - Disclaimer: information subject to change.