

Emergency bulk head | 3W | auto test | incl. pictograms

ARTICLE NUMBER: 600-021

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.

Impact-resistant and splashproof LED emergency luminaire with automatic self-test and 8 interchangeable pictograms. Suitable for wall and ceiling installation in indoor and outdoor environments. Delivers 200 lumens and 3 hours of emergency operation.

Key product features

- **Mounting method:** Wall surface/ceiling surface
- **Max. system power (W):** 3
- **Protection class (IP):** IP65
- **Recognition distance (m):** 20
- **Function:** Escape route lighting/signage
- **Impact resistance:** IK10
- **Emergency function monitoring system:** Automatic self-test

Technical specifications:

Product Name	Emergency bulk head 3W auto test incl. pictograms
Ean	8714984935303
Outer box qty	10st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	White
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	80 - 80mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Wall surface mounting/ceiling surface mounting
Degree of protection (IP)	IP65
Nominal voltage	220 - 240V
Length	340mm

24.08.2026 - Disclaimer: information subject to change.



Width	62mm
Height	105mm
Height/depth	105mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting/signage
With pictogram	Yes
Suitable for standby switching	Yes
Suitable for continuous circuit	Yes
Impact strength	IK10
RAL-number housing	9016
Connection type	Plug-in connection
Light distributor	Diffuser lens/optic/panel
Rated lifetime L70/B50 at 25 °C	50000h
Luminous flux in standby mode	200lm
Nominal operation time	3 - 3h
Max. system power	3W
Power factor	0.5
Type of wiring	Ending
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2- 1	200 - 200lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test
Luminous flux in emergency mode	200lm

24.08.2026 - Disclaimer: information subject to change.



Recognition distance	20m
Power consumption in emergency mode	2W
Type of indicator	Single-sided
Connectable conductor cross section	0.75 - 2.5mm ²
Suitable for labelling type	Sticker
Warranty	5 years (battery 2 years)
Ambient temperature	1 - 45°C

24.08.2026 - Disclaimer: information subject to change.

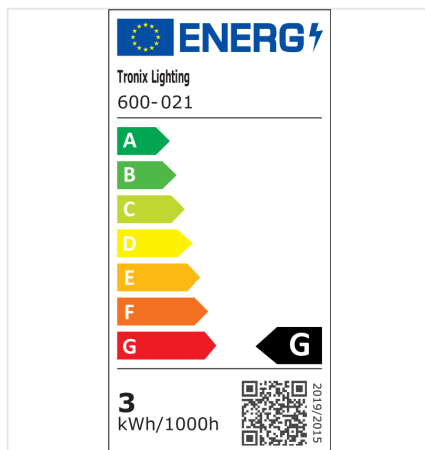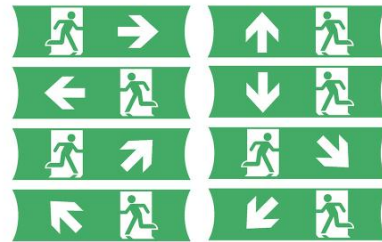

24.08.2026 - Disclaimer: information subject to change.