

Emergency downlight | 3W | 148*148mm | black | auto test

ARTICLE NUMBER: 600-029

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Square surface-mounted LED emergency luminaire with automatic self-test, interchangeable optics, and 220 lumen output. Suitable for escape routes and open areas. 3-hour autonomy.

Key product features

- **Mounting method:** Surface-mounted
- **Max. system power (W):** 3.5
- **Housing colour:** Black
- **Luminous flux in emergency mode (lm):** 220
- **Function:** Escape route lighting
- **Emergency function monitoring system:** Automatic self-test

Technical specifications:

Product Name	Emergency downlight 3W 148*148mm black auto test
Ean	8714984942325
Outer box qty	20st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	Black
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	30 - 30mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Ceiling surface mounting
Degree of protection (IP)	IP20
Nominal voltage	200 - 240V
Length	148mm
Width	148mm

24.08.2026 - Disclaimer: information subject to change.

Height	33mm
Height/depth	33mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting
With pictogram	No
Suitable for standby switching	Yes
Suitable for continuous circuit	No
Impact strength	IK00
RAL-number housing	9005
Connection type	Plug-in connection
Light distributor	Focal lens
Luminous flux in standby mode	220lm
Nominal operation time	3 - 3h
Max. system power	3W
Power factor	0.3
Type of wiring	Ending
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2- 1	220 - 220lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test
Luminous flux in emergency mode	220lm
Power consumption in emergency mode	1.8W

24.08.2026 - Disclaimer: information subject to change.




Connectable conductor cross section 0.75 - 2.5mm²

Warranty 5 years (battery 2 years)

Ambient temperature 1 - 45°C

24.08.2026 - Disclaimer: information subject to change.

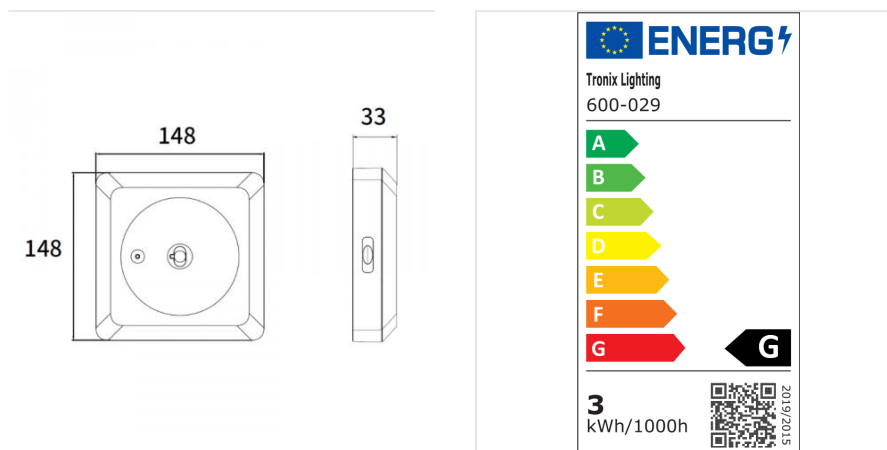

24.08.2026 - Disclaimer: information subject to change.