Emergency downlight | 3W | 148*148mm | black | auto test

ARTICLE NUMBER: 600-029

View this product in our webshop



15.11.2026 - Disclaimer: information subject to change.

Square surface-mounted LED emergency luminaire with automatic self-test, interchangeable optics, and 220 lumen output. Suitable for escape routes and open areas. 3-hour autonomy.

Key product features

- **Mounting method:** Surface-mounted
- **Max. system power (W):** 3.5
- **Housing colour:** Black
- **Luminous flux in emergency mode (lm):** 220
- **Function:** Escape route lighting
- **Emergency function monitoring system:** Automatic self-test

Technical specifications:


Product Name	Emergency downlight | 3W | 148*148mm | black | auto test
Ean	8714984942325
Outer box qty	20st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	Black
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	30 - 30mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Ceiling surface mounting
Degree of protection (IP)	IP20
Nominal voltage	200 - 240V
Length	148mm
Width	148mm


15.11.2026 - Disclaimer: information subject to change.

Height	33mm
Height/depth	33mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting
With pictogram	No
Suitable for standby switching	Yes
Suitable for continuous circuit	No
Impact strength	IK00
RAL-number housing	9005
Connection type	Plug-in connection
Light distributor	Focal lens
Luminous flux in standby mode	220lm
Nominal operation time	3 - 3h
Max. system power	3W
Power factor	0.3
Type of wiring	Ending
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2- 1	220 - 220lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test
Luminous flux in emergency mode	220lm
Power consumption in emergency mode	1.8W

15.11.2026 - Disclaimer: information subject to change.

Connectable conductor cross section	0.75 - 2.5mm??
Warranty	5 years (battery 2 years)
Ambient temperature	1 - 45??C

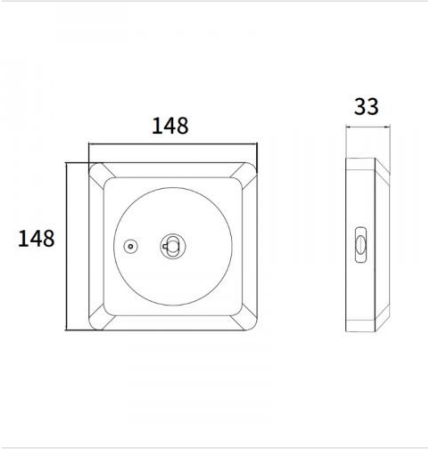

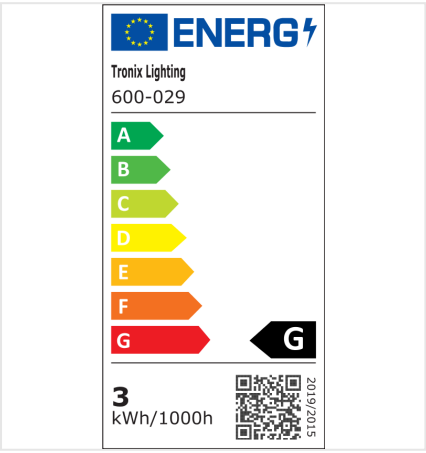

15.11.2026 - Disclaimer: information subject to change.