

Emergency downlight | 3W | Ø140mm | white | auto test

ARTICLE NUMBER: 600-025

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Versatile recessed or surface-mounted emergency lighting fixture with automatic self-test and interchangeable lens (oval/round). Suitable for escape routes and open areas. Includes integrated driver and battery.

Key product features

- **Mounting method:** Surface-mounted/recessed
- **Max. system power (W):** 3
- **Housing colour:** White
- **Luminous flux in emergency mode (lm):** 240
- **Function:** Escape route lighting
- **Emergency function monitoring system:** Automatic self-diagnosis

Technical specifications:

Product Name	Emergency downlight 3W Ø140mm white auto test
Ean	8714984935280
Outer box qty	30st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	White
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	80 - 80mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Surface mounting/recessed mounting
Degree of protection (IP)	IP20
Outer diameter	140mm
Nominal voltage	200 - 240V

24.08.2026 - Disclaimer: information subject to change.



Built-in height	55.34mm
Built-in height/depth	55.34mm
Height	61.55mm
Height/depth	61.55mm
Built-in diameter	112.5mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting
With pictogram	No
Suitable for standby switching	Yes
Suitable for continuous circuit	No
Impact strength	IK00
RAL-number housing	9016
Connection type	Plug-in connection
Light distributor	Focal lens
Luminous flux in standby mode	240lm
Nominal operation time	3 - 3h
Max. system power	3W
Power factor	0.3
Type of wiring	Ending
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2- 1	240 - 240lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test

24.08.2026 - Disclaimer: information subject to change.



Luminous flux in emergency mode	240lm
Power consumption in emergency mode	1.7W
Connectable conductor cross section	0.75 - 2.5mm ²
Warranty	5 years (battery 2 years)
Ambient temperature	1 - 45°C

24.08.2026 - Disclaimer: information subject to change.

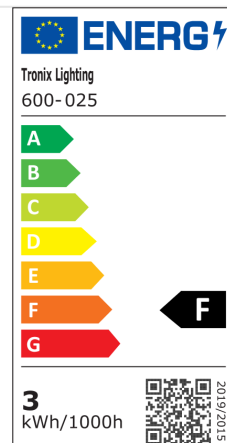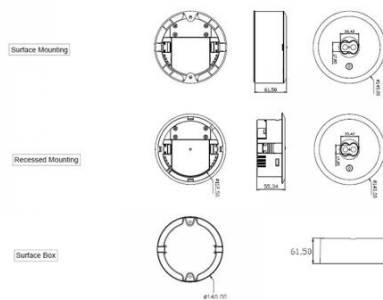

24.08.2026 - Disclaimer: information subject to change.