TRONIX guided by light

# Emergency light IP65 || 4W | black | auto test

ARTICLE NUMBER: 600-036

View this product in our webshop



14.11.2026 - Disclaimer: information subject to change.

Emergency lighting has become an integral part of safety regulations in buildings and offices. Emergency luminaires require functional design and visibility without dominating the environment. Tronix Emergency Lights make a natural blend with its surroundings, getting close to the perception of general lighting fixtures. The lamps can be adjusted independently of each other. The light spread makes these emergency luminaires ideal for large spaces such as warehouses.

**Features**

- **Emergency function** for a minimum of 3 hours
- High quality internal driver with optimum heat regulation
- Two independently adjustable lamps
- Suitable for installation in the ceiling or against a wall

**This fixture is equipped with auto test**

Autotest is a function that provides the emergency lighting with automatic periodic testing of the light source, electronics and battery, eliminating the need for manual checks. This is done via a protocol which complies with the international standard IEC62034.

1. Test after commissioning: as soon as the luminaire is connected for the first time. The batteries are charging for 24 hours, after 24 hours a full autonomy test takes place. After that, the batteries are recharging again for 24 hours.
2. Short function test: for 3 seconds the luminaire tests (after pressing and releasing the test button) the condition of battery, electronics and light source.
3. Monthly function test: automatic 3-minute monthly test.
4. Annual autonomy test: 3-hour automatic, annual, full autonomy test.

**Technical specifications:**

| | |
|---|---|
| Product Name | Emergency light IP65 \|\| 4W \| black \| auto test |
| Ean | 8714984940017 |

| | |
|---|---|
| Outer box qty | 20st |
| Housing material | Plastic |
| Lamp type | LED not exchangeable |
| Housing colour | Black |
| Material cover | Plastic, transparent |
| Voltage type | AC |
| Nominal current | 16.67 - 16.67mA |
| Type of control gear | LED operating device current-controlled |
| Battery technology | Lithium-ion |
| Mounting method | Ceiling surface mounting |
| Degree of protection (IP) | IP65 |
| Nominal voltage | 220 - 240V |
| Length | 279mm |
| Width | 127mm |
| Height | 91.4mm |
| Height/depth | 91.4mm |
| Colour temperature | 5000 - 5000K |
| Exchangeable control gear | No |
| Function | Escape route lighting |
| With pictogram | No |
| Suitable for standby switching | Yes |
| Number of lighting heads | 2 |
| Suitable for continuous circuit | Yes |
| Impact strength | IK02 |
| RAL-number housing | 9005 |
| Connection type | Plug-in connection |
| Light distributor | Focal lens |

14.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Nominal operation time | 3 - 3h |
| Max. system power | 4W |
| Power factor | 0.3 |
| Type of wiring | Ending |
| Number of poles | 2 |
| With heating element for battery | No |
| Type of lithium-ion battery | Lithium iron phosphate (LiFePO4) |
| Rated luminous flux according to IEC 62722-2- 1 | 400 - 400lm |
| Emergency power supply system | Peripheral (individual battery) |
| Emergency function monitoring system | Automatic self test |
| Luminous flux in emergency mode | 40lm |
| Connectable conductor cross section | 0.75 - 2.5mm?? |
| Warranty | 5 years (battery 2 years) |
| Ambient temperature | 1 - 45??C |


14.11.2026 - Disclaimer: information subject to change.










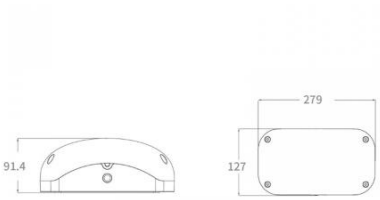

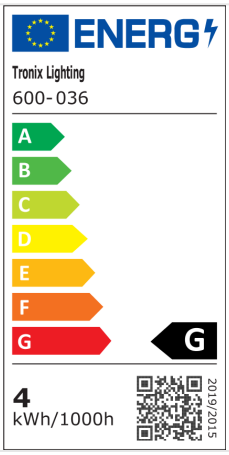
14.11.2026 - Disclaimer: information subject to change.