

Emergency track light | 6W | black | auto test

ARTICLE NUMBER: 600-049

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Compact emergency lighting for 3-phase tracks featuring an interchangeable lens and durable LiFePO4 battery. Includes autotest functionality compliant with IEC62034. Ideal for a wide range of applications with round or oval lens options.

Key Product Features:

- **Max. system power (W):** 6
- **Housing color:** Black
- **Battery technology:** Lithium-ion
- **Function:** Emergency lighting
- **Light distributor:** Focus lens
- **Nominal operation time (h):** 3

Technical specifications:

Product Name	Emergency track light 6W black auto test
Ean	8714984950795
Outer box qty	27st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	Black
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	80 - 80mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Busbar adaptor
Degree of protection (IP)	IP20
Nominal voltage	200 - 240V
Length	140mm

24.08.2026 - Disclaimer: information subject to change.

Width	140mm
Height	48mm
Height/depth	48mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting
With pictogram	No
Suitable for standby switching	Yes
Suitable for continuous circuit	No
Impact strength	IK02
RAL-number housing	9005
Connection type	Plug-in connection
Light distributor	Focal lens
Nominal operation time	3 - 3h
Max. system power	6W
Power factor	0.3
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2-1	450 - 450lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test
Luminous flux in emergency mode	450lm
Power consumption in emergency mode	4W
Connectable conductor cross section	0 - 0mm??

24.08.2026 - Disclaimer: information subject to change.



Warranty

5 years (battery 2 years)

Ambient temperature

1 - 45??C

24.08.2026 - Disclaimer: information subject to change.





CARE



SHARE



CONNECT

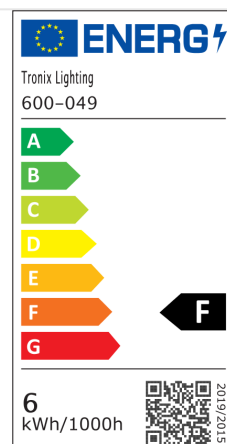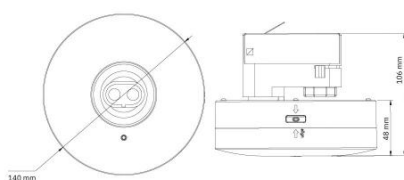

24.08.2026 - Disclaimer: information subject to change.