Emergency wall light IP66 | 5/10W 3-CCT | black | auto test

ARTICLE NUMBER: 600-050

View this product in our webshop



IP66 wall-mounted emergency luminaire with automatic self-test and selectable colour temperature (3000K, 4000K, 5000K). Designed for wall installation above emergency exits. Provides 3 hours of emergency lighting in the event of a power failure.

Key product features

- **Mounting method:** Wall surface mounted
- **Housing colour:** Black
- **Luminous flux in emergency mode (lm):** 1000
- **Colour temperature (K):** 3000 – 5000
- **Function:** Escape route lighting
- **Emergency function monitoring system:** Automatic self-test

Technical specifications:

Product Name	Emergency wall light IP66 | 5/10W 3-CCT | black | auto test
Ean	8714984952034
Outer box qty	4st
Housing material	Aluminium
Lamp type	LED not exchangeable
Housing colour	Black
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	78 - 78mA
Type of control gear	LED operating device voltage-controlled
Battery technology	Lithium-ion
Mounting method	Wall surface mounted
Degree of protection (IP)	IP66
Nominal voltage	220 - 240V
Length	200mm


Width	200mm
Height	90mm
Height/depth	90mm
Colour temperature	3000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting
With pictogram	No
Suitable for standby switching	Yes
Suitable for continuous circuit	Yes
Impact strength	IK07
RAL-number housing	9005
Connection type	Plug-in connection
Light distributor	Focal lens
Rated lifetime L70/B50 at 25 ??C	50000h
Luminous flux in standby mode	1176lm
Nominal operation time	3 - 3h
Max. system power	18W
Power factor	0.9
Type of wiring	Suitable for loop-through wiring
Number of poles	3
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2- 1	605 - 1176lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test
Luminous flux in emergency mode	1176lm


12.11.2026 - Disclaimer: information subject to change.

Power consumption in emergency mode	10W
Connectable conductor cross section	0.75 - 2.5mm??
Warranty	2 years
Ambient temperature	0 - 45??C







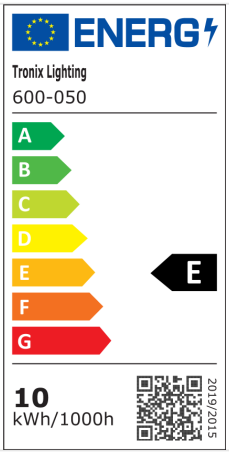

12.11.2026 - Disclaimer: information subject to change.