

Emergency wall light IP66 | 5/10W 3-CCT | black | auto test

ARTICLE NUMBER: 600-050

View this
product in
our
webshop



14.07.2026 - Disclaimer: information subject to change.



IP66 wall-mounted emergency luminaire with automatic self-test and selectable colour temperature (3000K, 4000K, 5000K). Designed for wall installation above emergency exits. Provides 3 hours of emergency lighting in the event of a power failure.

Key product features

- **Mounting method:** Wall surface mounted
- **Housing colour:** Black
- **Luminous flux in emergency mode (lm):** 1000
- **Colour temperature (K):** 3000 – 5000
- **Function:** Escape route lighting
- **Emergency function monitoring system:** Automatic self-test

Technical specifications:

Product Name	Emergency wall light IP66 5/10W 3-CCT black auto test
Ean	8714984952034
Outer box qty	4st
Housing material	Aluminium
Lamp type	LED not exchangeable
Housing colour	Black
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	78 - 78mA
Type of control gear	LED operating device voltage-controlled
Battery technology	Lithium-ion
Mounting method	Wall surface mounted
Degree of protection (IP)	IP66
Nominal voltage	220 - 240V
Length	200mm

14.07.2026 - Disclaimer: information subject to change.

Width	200mm
Height	90mm
Height/depth	90mm
Colour temperature	3000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting
With pictogram	No
Suitable for standby switching	Yes
Suitable for continuous circuit	Yes
Impact strength	IK07
RAL-number housing	9005
Connection type	Plug-in connection
Light distributor	Focal lens
Rated lifetime L70/B50 at 25 °C	50000h
Luminous flux in standby mode	1176lm
Nominal operation time	3 - 3h
Max. system power	18W
Power factor	0.9
Type of wiring	Suitable for loop-through wiring
Number of poles	3
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2- 1	605 - 1176lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test
Luminous flux in emergency mode	1176lm

14.07.2026 - Disclaimer: information subject to change.



Power consumption in emergency mode 10W

Connectable conductor cross section 0.75 - 2.5mm??

Warranty 2 years

14.07.2026 - Disclaimer: information subject to change.





CARE



SHARE



CONNECT

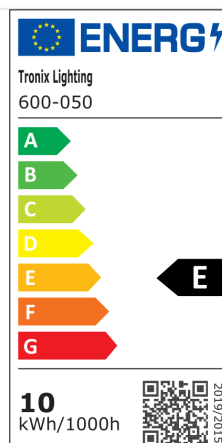

14.07.2026 - Disclaimer: information subject to change.