

Ground spot | 195mm | 18,8W |
asymmetrical | 3000K

ARTICLE NUMBER: 140-075

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.

Subtle yet powerful: these ground spots offer asymmetric optics, warm white light and a durable stainless steel finish for precise façade or object lighting.

Key product features:

- **Light distribution:** Asymmetric
- **Outer diameter (mm):** 195
- **Built-in diameter (mm):** 174
- **Degree of protection (IP):** IP67
- **Colour temperature (K):** 3000 – 3000
- **Max. system power (W):** 18.8

Technical specifications:

Product Name	Ground spot 195mm 18,8W asymmetrical 3000K
Ean	8714984935761
Outer box qty	8st
Dimmable	No
Dimming DMX	No
Dimming phase cut-off (trailing edge)	No
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	Anthracite
Housing material	Aluminium
Material cover	Glass transparent
Connection type	Other
Built-in length	111mm
Built-in height/depth	111mm
Built-in diameter	174mm

24.08.2026 - Disclaimer: information subject to change.

Outer diameter	195mm
Colour of light	White
Colour temperature	3000K
Colour rendering index CRI	80-89
Colour of light adjustable	No
Luminous flux adjustable	No
Constant light output (CLO)	No
Beam angle	41-80° - Wide beam
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	91 - 91mA
Number of poles	3
Light source included	Yes, fixed LED
Light distributor	Reflector
Light distribution	Asymmetric
Connectable conductor cross section	0.75 - 2.5mm ²
Type of control gear	LED operating device current-controlled
With control gear	Yes
Exchangeable control gear	No
Max. surface temperature	50°C
Max. load	1.7kg
Over rollable	No
Electrical connection with connector system	No
Adjustable	No
Degree of protection (IP)	IP67

24.08.2026 - Disclaimer: information subject to change.



Rated lifetime L70/B50 at 25 °C	30000h
---------------------------------	--------

Max. system power	18.8W
-------------------	-------

Rated luminous flux according to IEC 62722-2- 1	1128 - 1128lm
---	---------------

Luminaire efficacy	61lm/W
--------------------	--------

Impact strength	IK09
-----------------	------


Power factor	0.9
--------------	-----

Type of wiring	Ending
----------------	--------

Warranty	2 years
----------	---------

Ambient temperature	-20 - 50°C
---------------------	------------

24.08.2026 - Disclaimer: information subject to change.

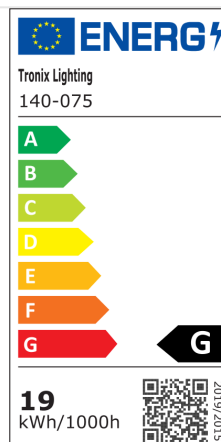

24.08.2026 - Disclaimer: information subject to change.