

Ground spot | 230V | 106mm | 9 watt | 3000K
| adj. | dim

ARTICLE NUMBER: 140-081

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Durable ground spotlight with fixed LED, IP67, IK10, dimmable via phase-cut. Includes internal driver and 3m PUR cable – ideal for long-term outdoor use.

Key product features:

- **Outer diameter (mm):** 106
- **Built-in diameter (mm):** 98
- **Degree of protection (IP):** IP67
- **Colour temperature (K):** 3000
- **Dimming trailing edge:** Yes
- **Impact strength:** IK10
- **Max. system power (W):** 9

Technical specifications:

Product Name	Ground spot 230V 106mm 9 watt 3000K adj. dim
Ean	8714984936157
Outer box qty	12st
Dimmable	Yes
Dimming DMX	No
Dimming phase cut-off (trailing edge)	Yes
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	Anthracite
Housing material	Aluminium
Material cover	Glass transparent
Connection type	Other
Length	132mm
Height/depth	132mm
Built-in length	151mm

24.08.2026 - Disclaimer: information subject to change.





Built-in height/depth	151mm
Built-in diameter	98mm
Outer diameter	106mm
Colour of light	White
Colour temperature	3000K
Colour rendering index CRI	80-89
Colour of light adjustable	No
Luminous flux adjustable	Continuously variable
Constant light output (CLO)	No
Beam angle	21-40° - Medium beam
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	40 - 40mA
Number of poles	3
Light source included	Yes, fixed LED
Light distributor	Reflector
Light distribution	Symmetric
Connectable conductor cross section	0.75 - 2.5mm ²
Type of control gear	LED operating device current-controlled
With control gear	Yes
Exchangeable control gear	Yes
Max. surface temperature	50°C
Max. load	100kg
Over rollable	No
Electrical connection with connector system	No

24.08.2026 - Disclaimer: information subject to change.



Adjustable	Yes
Degree of protection (IP)	IP67
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	9W
Rated luminous flux according to IEC 62722-2- 1	585 - 585lm
Luminaire efficacy	65lm/W
Impact strength	IK10
Power factor	0.97
Type of wiring	Ending
Warranty	3 years
Ambient temperature	-20 - 50°C

24.08.2026 - Disclaimer: information subject to change.

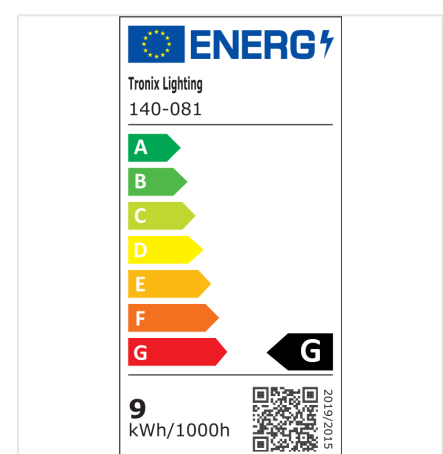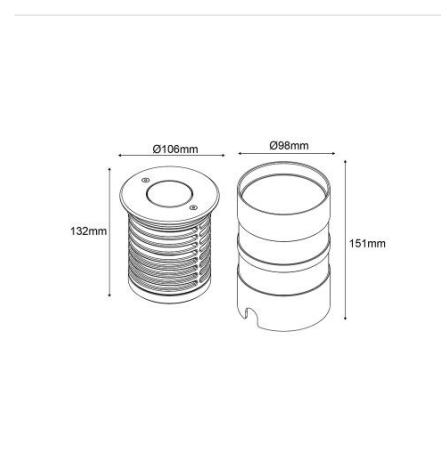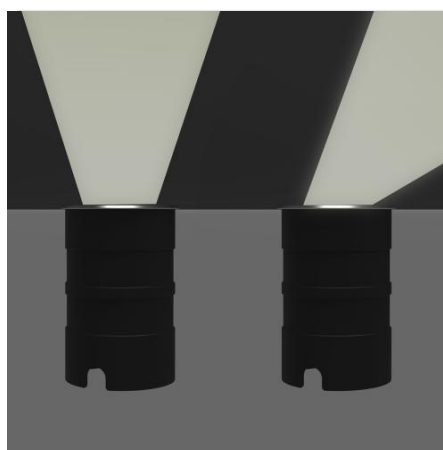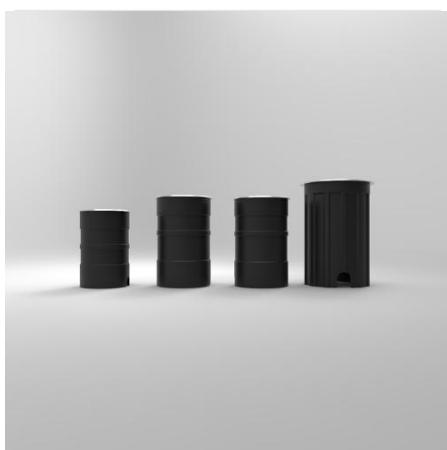

24.08.2026 - Disclaimer: information subject to change.