Ground spot || 24V | 60mm | single side | 2,4W | 3000K

ARTICLE NUMBER: 140-015

View this product in our webshop



13.11.2026 - Disclaimer: information subject to change.

24V ground spot with high-quality aluminium cover ring, CREE LEDs and a single lightbeam on one side. Power supply excluded.

Features

- IK08 and IP67
- 24V, excluding power supply
- Extra long connection cable (3 meters)

Technical specifications:


Product Name	Ground spot || 24V | 60mm | single side | 2,4W | 3000K
Ean	8714984925977
Outer box qty	50st
Dimmable	No
Dimming DMX	No
Dimming phase cut-off (trailing edge)	No
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	Beige
Housing material	Aluminium
Material cover	Other
Connection type	Other
Length	87mm
Height/depth	87mm
Built-in length	90mm
Built-in height/depth	90mm
Built-in diameter	40mm
Outer diameter	60mm
Colour of light	White
Colour temperature	3000K


Colour rendering index CRI	80-89
Colour of light adjustable	No
Luminous flux adjustable	No
Constant light output (CLO)	No
Beam angle	> 80° - Extreme wide beam
Beam angle adjustable	No
Voltage type	DC
Nominal voltage	24 - 24V
Nominal current	700 - 700mA
Number of poles	2
Light source included	Yes, fixed LED
Light distributor	Diffuser lens/optic/panel
Light distribution	Symmetric
Connectable conductor cross section	0.75 - 2.5mm²
Type of control gear	LED operating device voltage-controlled
With control gear	No
Exchangeable control gear	Yes
Max. surface temperature	50°C
Max. load	0.25kg
Over rollable	No
Housing material quality	Other
Electrical connection with connector system	No
Adjustable	No
Degree of protection (IP)	IP67
Rated lifetime L70/B50 at 25 °C	30000h
Max. system power	2.4W

13.11.2026 - Disclaimer: information subject to change.

Rated luminous flux according to IEC 62722-2- 1	111 - 111lm
Luminaire efficacy	46.3lm/W
Impact strength	IK08
Type of wiring	Ending
Warranty	3 years
Ambient temperature	-20 - 50°C



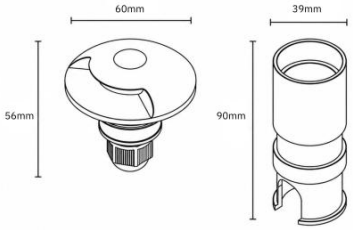

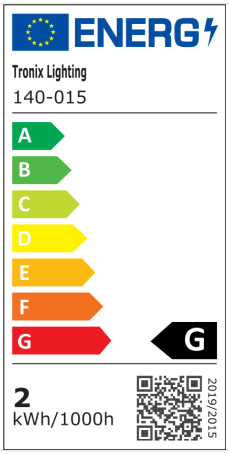

13.11.2026 - Disclaimer: information subject to change.