TRONIX guided by light

High bay || 50 watt | 130 Lm/W | 3-CCT | non dimmable

ARTICLE NUMBER: 950-024

View this product in our webshop



15.11.2026 - Disclaimer: information subject to change.

CARE SHARE CONNECT

tronixlighting.com

A powerful high bay in a compact and luxurious package? This white high bay is extremely well suited for various locations such as the warehouse, workshop, stores or exhibition halls thanks to its sophisticated appearance. This high bay features an aluminum housing and a polycarbonate shade, combined with a beam angle of no less than 120°.

In addition, this high bay offers the ability to switch between different color temperatures, allowing you to easily incorporate this product within a project of your choosing.

Features

- 120° polycarbonate shade
- 3-CCT switch, adjustable to 3000, 4000 or 5000K
- IP20, IK08
- Long life of L80 74.000 hours
- Ideal for installation in warehouses due to the wide beam angle

Technical specifications:

Product Name	High bay || 50 watt | 130 Lm/W | 3-CCT | non dimmable
Ean	8714984938748
Outer box qty	1st
Dimmable	No
Dimming 0-10 V	No
Lamp type	LED not exchangeable
Housing colour	White
Housing material	Aluminium
Connection type	Other
Height/depth	276mm
Outer diameter	278mm
With movement sensor	No

15.11.2026 - Disclaimer: information subject to change.


With presence detector	No
With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6
Colour temperature	3000 - 4000 - 5000K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	No
Beam angle	> 80° - Extreme wide beam
Beam angle adjustable	No
Voltage type	AC
Nominal current	206 - 206mA
Nominal voltage	233 - 233V
Number of poles	3
Light distributor	None
Light distribution	Symmetric
Connectable conductor cross section	0.75 - 2.5mm²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP20
Impact strength	IK08
Rated lifetime L70/B50 at 25 °C	118000h
Max. system power	50W
Rated luminous flux according to IEC 62722-2- 1	6503 - 6503lm
Luminaire efficacy	141 - 141lm/W


15.11.2026 - Disclaimer: information subject to change.

Power factor	0.96
Type of wiring	Ending
Suitable for ceiling mounting	Yes
Suitable for suspended mounting	Yes
Reflector	None
Material reflector	Plastic
Warranty	5 years
Ambient temperature	-30 - 50°C





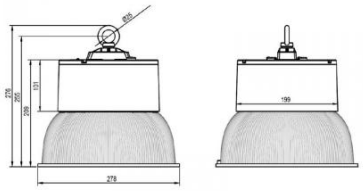

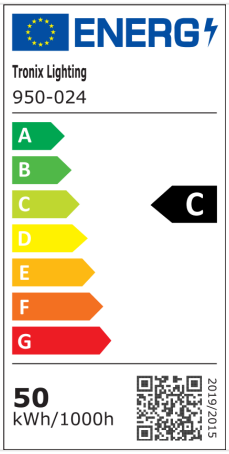

15.11.2026 - Disclaimer: information subject to change.