

Industrial lightbar 150cm ||52W | 120° | 3- CCT | IP65 | IK08

ARTICLE NUMBER: 950-078

View this
product in
our
webshop



14.07.2026 - Disclaimer: information subject to change.



This industrial light bar is pre-adjustable to 3000K, 4000K and 5700K through a CCT switch on the fixture. The light bar is easy to mount on the ceiling, as well as suspended using special 950-079 steel cables.

Features

- High luminous efficiency of >150 Lm/W
- Variable color temperature with 3000K, 4000K and 5700K
- IP65 waterproof
- Includes suspension clips and waterproof connectors (M20)
- Quick to assemble by simple click system. Both for opening the fixture, and the built-in connection block



Technical specifications:

Product Name	Industrial lightbar 150cm 52W 120° 3-CCT IP65 IK08
Ean	8714984947856
Outer box qty	6st
Dimmable	No
Connection type	Push-in clamp
Lamp type	LED not exchangeable
Housing colour	Grey
Material	Plastic
Length	150cm
Length	1500mm
Width	77mm
Height/depth	69mm
With movement sensor	No
With presence detector	No
With light sensor	No
Colour of light	White

14.07.2026 - Disclaimer: information subject to change.

Colour temperature	5000K
Colour rendering index CRI	80-89
Colour of light adjustable	No
Luminous flux adjustable	Positions
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	100 - 240V
Nominal current	1500 - 1500mA
Number of poles	5
Light distributor	Diffuser lens/optic/panel
Connectable conductor cross section	1 - 2.5mm ²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP65
Impact strength	IK08
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	52W
Rated luminous flux according to IEC 62722-2- 1	7800 - 7800lm
Luminaire efficacy	150lm/W
Power factor	0.9
Type of wiring	Loop-through wiring included
Suitable for emergency lighting	No
Emergency power supply system	None
Emergency function monitoring system	None
Warranty	5 years

14.07.2026 - Disclaimer: information subject to change.

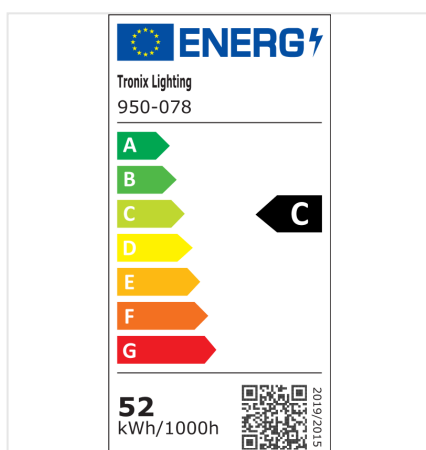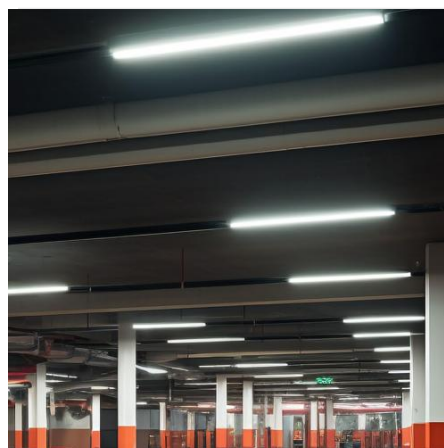

14.07.2026 - Disclaimer: information subject to change.