


LED driver | 200~350mA | 10W | multi dimmable | indoor

ARTICLE NUMBER: 215-205

View this
product in
our
webshop

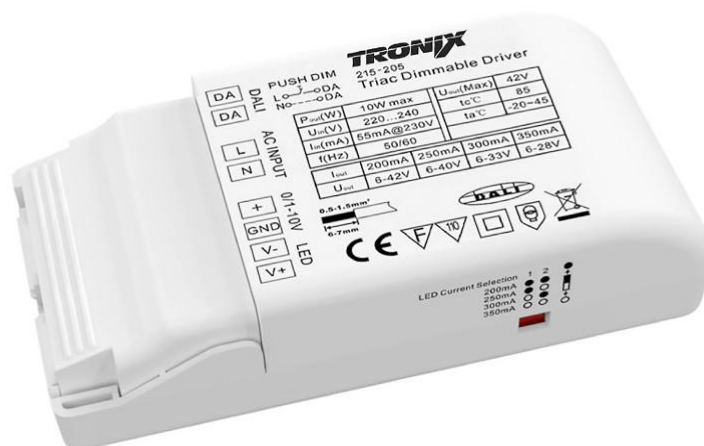

24.08.2026 - Disclaimer: information subject to change.



What is so extraordinary about this trailing edge dim driver, is that it's designed for a large number of different interfaces, such as DALI, Push and trailing edge, as well as 0/1-10V dim interfaces. As a result, this driver is able to work with different operating systems.

Features

- Equipped with a combined output: an Amplitude dimming output (100% -10%) and a PWM dimming output (10% -1%).
- Power factor of >0.9, high efficiency >83%
- Very smooth dimming, back dimming possible up to 1% without flicker effect or buzzing sound.
- Automatic assignment of 1 DALI address by DALI masters.
- Complies with IEC 62386-101, IEC 62386-102, IEC 62386-207 standards.

Technical specifications:


Product Name	LED driver 200~350mA 10W multi dimmable indoor
Ean	8714984932388
Outer box qty	25st
Housing	Plastic housing
Model	Static
Output voltage	6 - 42V
Output current	200 - 350mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	No
Output power	8.4 - 10W
Degree of protection (IP)	IP20
Length	104mm
Width	53mm
Height	30mm

24.08.2026 - Disclaimer: information subject to change.



Power consumption	10W
Input voltage	220 - 240V
Frequency input voltage	50 - 60Hz
PWM modulation	Yes
Overload protection	Yes
Overtemperature protection	Yes
Control method	Multi dimmable
Short-circuit protected	Yes
Ambient temperature	-20 - 45??C
Driver lifetime	100000h
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

24.08.2026 - Disclaimer: information subject to change.

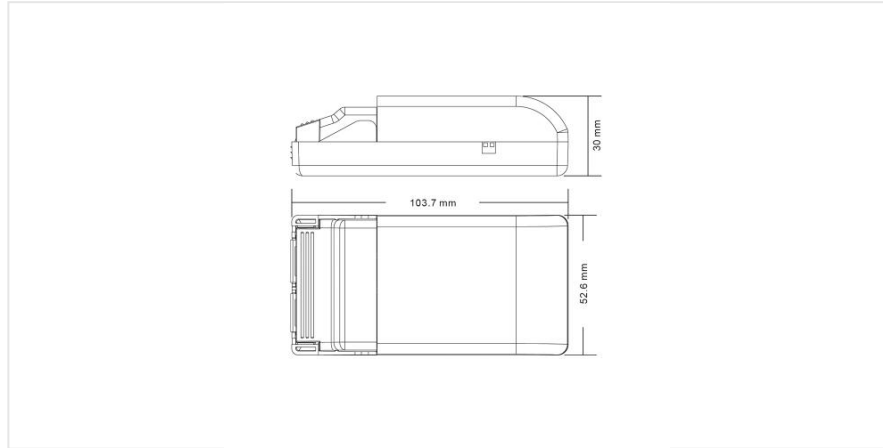

24.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT