


LED driver | 700mA | 6 watt | IP20 | 4 ~ 9 volt  
| dimmable

ARTICLE NUMBER: 215-325

View this  
product in  
our  
webshop

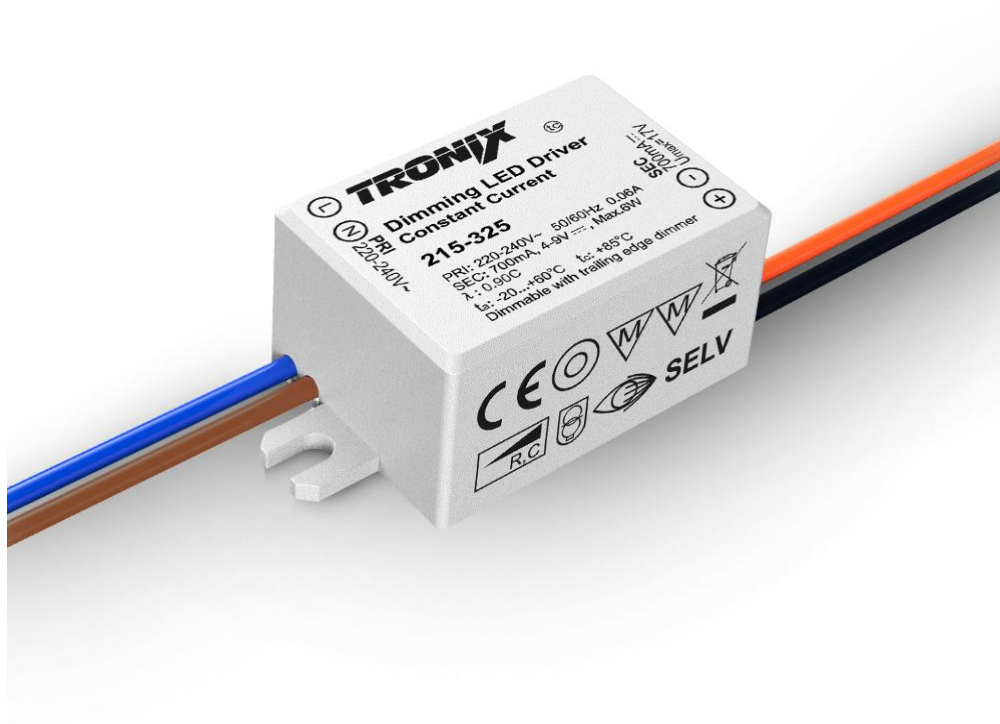

25.08.2026 - Disclaimer: information subject to change.



This flicker-free LED driver has a maximum output of 6W and 700mA and is extremely well suited for use with various light sources. Thanks to the techniques present, this driver is flicker-free, which means that (dimnable) lighting looks calm at all times.

## Features

- Dimmable on phase cut-off and cut-on
- Output voltage from 4 ~ 9 V
- Super compact size 38\*27\*21 mm

## Technical specifications:


|                                        |                                                            |
|----------------------------------------|------------------------------------------------------------|
| Product Name                           | LED driver   700mA   6 watt   IP20   4 ~ 9 volt   dimmable |
| Ean                                    | 8714984941076                                              |
| Outer box qty                          | 200st                                                      |
| Housing                                | Plastic housing                                            |
| Model                                  | Static                                                     |
| Output voltage                         | 4 - 9V                                                     |
| Output current                         | 700 - 700mA                                                |
| Suitable for outdoor use               | Yes                                                        |
| Suitable for DC-voltage (primary side) | No                                                         |
| Output power                           | 6 - 6W                                                     |
| Degree of protection (IP)              | IP20                                                       |
| Length                                 | 38mm                                                       |
| Width                                  | 27mm                                                       |
| Height                                 | 21mm                                                       |
| Power consumption                      | 6W                                                         |
| Input voltage                          | 220 - 240V                                                 |
| Frequency input voltage                | 50 - 60Hz                                                  |
| Overload protection                    | Yes                                                        |

25.08.2026 - Disclaimer: information subject to change.



|                               |                       |
|-------------------------------|-----------------------|
| Overtemperature protection    | Yes                   |
| Control method                | Trailing edge dimming |
| Short-circuit protected       | Yes                   |
| Ambient temperature           | -20 - 60??C           |
| Driver lifetime               | 50000h                |
| DIN-rail mounting             | No                    |
| Brand                         | Tronix Lighting       |
| Dimmable                      | Yes                   |
| Emergency power supply system | None                  |
| Control type                  | Constant current      |
| Warranty                      | 5 years               |

25.08.2026 - Disclaimer: information subject to change.

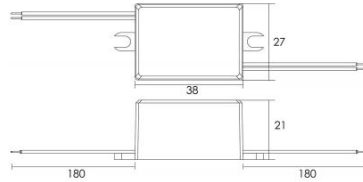

25.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT