TRONIX guided by light

LED driver | eldoLED DUALdrive 20MA-E2Z0C | 20W | DALI DT8

ARTICLE NUMBER: 215-642

View this product in our webshop

eldoLED



12.11.2026 - Disclaimer: information subject to change.

The DUALdrive LED drivers from eldoLED have two programmable outputs (constant current) and are fully adjustable. This makes it possible, provided you program the LED data, to provide fixtures with the desired light color and light output. Ideal to combine with tuneable white fixtures controlled via DALI.

Features

- Can be combined with the 214-232 Casambi module (via the LED code input)
- Can be combined with a variety of LED lighting, including tuneable white lighting on DALI
- Output current: 150 - 1050 mA
- Output voltage: 2 - 40 volts

Technical specifications:


Product Name	LED driver | eldoLED DUALdrive 20MA-E2Z0C | 20W | DALI DT8
Ean	8714984943834
Outer box qty	50st
Housing	Plastic housing
Model	Static
Output voltage	2 - 40V
Output current	150 - 1050mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	20 - 20W
Degree of protection (IP)	IP20
Length	183.4mm
Width	41.3mm

12.11.2026 - Disclaimer: information subject to change.

Height	30mm
Power consumption	20W
Input voltage	176 - 250V
Frequency input voltage	50 - 60Hz
Overload protection	Yes
Overtemperature protection	Yes
Control method	DALI
Short-circuit protected	Yes
Ambient temperature	-20 - 50??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	eldoLED
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

12.11.2026 - Disclaimer: information subject to change.

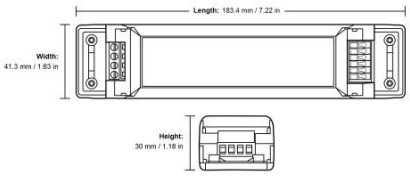


Length: 183.4 mm / 7.22 in
Width:
41.3 mm / 1.63 in
Height:
30 mm / 1.18 in