# LED driver | eldoLED DUALdrive 20MA-E2Z0D | 20W | DALI DT6

ARTICLE NUMBER: 215-641

View this product in our webshop

eldoLED



25.11.2026 - Disclaimer: information subject to change.

The DUALdrive LED drivers from eldoLED have two programmable outputs (constant current) and are fully adjustable. This makes it possible, provided you program the LED data, to provide fixtures with the desired light color and light output. Ideal to combine with tuneable white fixtures controlled via DALI.

**Features**

- Can be combined with the 214-231 Casambi module (via the LED code input)
- Can be combined with a variety of LED lighting, including tuneable white lighting on DALI
- Output current: 150 - 1050 mA
- Output voltage: 2 - 40 volts

**Technical specifications:**

| | |
|---|---|
| Product Name | LED driver \| eldoLED DUALdrive 20MA-E2Z0D \| 20W \| DALI DT6 |
| Ean | 8714984943872 |
| Outer box qty | 50st |
| Housing | Plastic housing |
| Model | Static |
| Output voltage | 2 - 40V |
| Output current | 150 - 1050mA |
| Suitable for outdoor use | No |
| Suitable for DC-voltage (primary side) | Yes |
| Output power | 20 - 20W |
| Degree of protection (IP) | IP20 |
| Length | 183.4mm |
| Width | 41.3mm |
| Height | 30mm |
| Power consumption | 20W |

25.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Input voltage | 176 - 250V |
| Frequency input voltage | 50 - 60Hz |
| Overload protection | Yes |
| Overtemperature protection | Yes |
| Control method | DALI |
| Short-circuit protected | Yes |
| Ambient temperature | -20 - 50??C |
| Driver lifetime | 50000h |
| DIN-rail mounting | No |
| Brand | eldoLED |
| Dimmable | Yes |
| Emergency power supply system | None |
| Control type | Constant current |
| Warranty | 5 years |



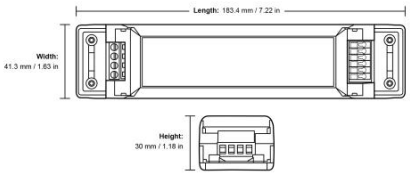
Length: 183.4 mm / 7.22 in
Width:
41.3 mm / 1.63 in
Height:
30 mm / 1.18 in