

LED driver | eldoLED DUALdrive 562/A - DT8 driver | 50W

ARTICLE NUMBER: 215-269

View this
product in
our
webshop



eldoLED



24.08.2026 - Disclaimer: information subject to change.

The DUALdrive LED drivers from eldoLED have two programmable outputs (constant current) and are fully adjustable. This makes it possible, provided you program the LED data, to provide fixtures with the desired light color and light output. Ideal to combine with tuneable white fixtures controlled via DALI.

Features

- Can be combined with the 214-231 Casambi module (via the LED code input)
- Can be combined with a variety of LED lighting, including tuneable white lighting on DALI
- Output current: 150 - 1400 mA
- Output voltage: 1,5 - 55 volts

Technical specifications:


Product Name	LED driver eldoLED DUALdrive 562/A - DT8 driver 50W
Ean	8714984937574
Outer box qty	40st
Housing	Plastic housing
Model	Static
Output voltage	1.5 - 55V
Output current	150 - 1400mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	50 - 50W
Degree of protection (IP)	IP20
Length	153mm
Width	76.2mm
Height	30.5mm
Power consumption	50W

24.08.2026 - Disclaimer: information subject to change.



Input voltage	120 - 250V
Frequency input voltage	- - -Hz
PWM modulation	No
Overload protection	Yes
Overtemperature protection	Yes
Control method	DALI
Short-circuit protected	Yes
Ambient temperature	-20 - 50??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	eldoLED
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

24.08.2026 - Disclaimer: information subject to change.

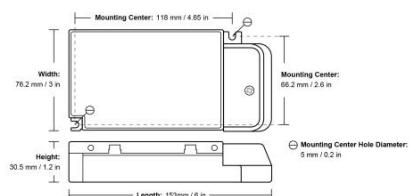

24.08.2026 - Disclaimer: information subject to change.