

LED driver | eldoLED ECOdrive 20CA-E1Z0A | 20W | 0-10V

ARTICLE NUMBER: 215-600

View this
product in
our
webshop



eldoLED



14.07.2026 - Disclaimer: information subject to change.



Designed specifically for downlights, this eldoLED ECOdrive LED driver offers a unique combination of adjustable output current within a compact design. This ensures easy and safe installation, as you only need a 45 mm cutout.

Features

- Compact size for easy installation. The driver fits through openings of only 45 mm and even works in ceilings with only 100 mm space.
- Easy programming thanks to the LEDcode interface.
- Flicker-free dimming for a smooth dimming experience from 100% to 1%.


Technical specifications:

Product Name	LED driver eldoLED ECOdrive 20CA-E1Z0A 20W 0-10V
Ean	8714984949904
Outer box qty	50st
Housing	Plastic housing
Model	Static
Output voltage	2 - 40V
Output current	150 - 1050mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	20 - 20W
Degree of protection (IP)	IP20
Length	150.5mm
Width	42.1mm
Height	27.9mm
Power consumption	20W
Input voltage	176 - 250V

14.07.2026 - Disclaimer: information subject to change.

Frequency input voltage	50 - 60Hz
PWM modulation	No
Overload protection	Yes
Overtemperature protection	Yes
Control method	0/1-10V
Short-circuit protected	Yes
Ambient temperature	-20 - 50??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	eldoLED
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

14.07.2026 - Disclaimer: information subject to change.

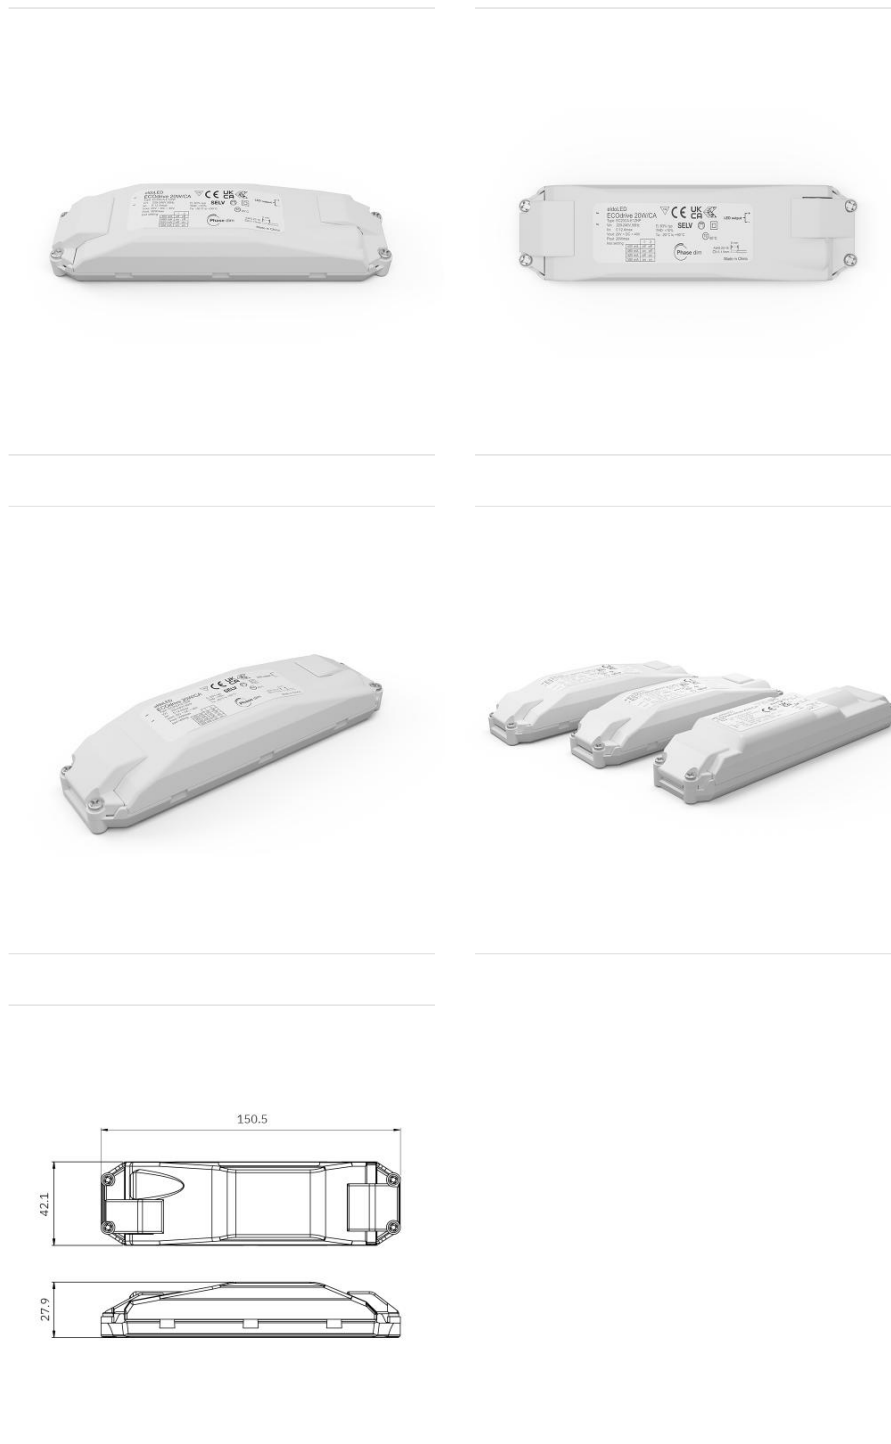

14.07.2026 - Disclaimer: information subject to change.