

LED driver | eldoLED ecodrive 240/A | 20W | DALI

ARTICLE NUMBER: 215-267

View this
product in
our
webshop



eldoLED



24.08.2026 - Disclaimer: information subject to change.

The ECOdrive LED drivers from eldoLED feature a programmable output (constant current) and dim smoothly down to 1%, with excellent flicker performance. Also easy to apply in combination with single color, dimmable LED fixtures on a DALI basis.

Features

- Can be combined with the 214-231 Casambi module (via the LED code input)
- Can be combined with a variety of LED lighting, including single color lighting on DALI
- Output current: 150 - 1050 mA
- Output voltage: 10 - 40 volts


Technical specifications:

Product Name	LED driver eldoLED ecodrive 240/A 20W DALI
Ean	8714984941564
Outer box qty	50st
Housing	Plastic housing
Model	Static
Output voltage	10 - 40V
Output current	150 - 1050mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	20 - 20W
Degree of protection (IP)	IP20
Length	160.8mm
Width	41.5mm
Height	30.5mm
Power consumption	20W

24.08.2026 - Disclaimer: information subject to change.

Input voltage	176 - 250V
Frequency input voltage	50 - 60Hz
PWM modulation	No
Overload protection	Yes
Overtemperature protection	Yes
Control method	DALI
Short-circuit protected	Yes
Ambient temperature	-20 - 50??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	eldoLED
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

24.08.2026 - Disclaimer: information subject to change.

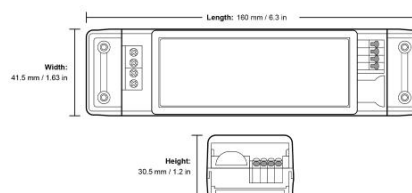

24.08.2026 - Disclaimer: information subject to change.